

## KEY FEATURES

- Attractive styling Design
- High Reliability Die-Cast Aluminum Alloy Construction
- Cable Entry with IP68 Glands
- High Wear / UV Resistant Rubber Seal
- Stainless Allen-head Screws for Tampering and Rust prevention
- 3 mm Temper glass window with High Reliability Gel
- Weatherproof to highest level IP68
- Robust Cable management bracket assembly
- Designed for Indoor/Outdoor Applications
- Easy Access for Servicing and Installation
- Fused input terminal block
- Models Available with Factory-Installed Heater and Blower with Multiple voltage option



**PATENTED H1B1 ENCLOSURE AND MOUNT**


The **VISUS CITY** Series comprises a stylish pressure die cast enclosure, sized to suit CCD cameras with fixed focus lenses, plus wall bracket with cable management system.

The equipment has a compact body length of 13.38 (base) and 14.76 (overall) inches (34.0 and 37.5 cm, respectively).

**VISUS CITY** Series is designed to provide the installer with a secure and reliable camera option.

The internal camera cavity is simply accessed by loosening 3 stainless Allen screws. Two adjustable glands (PG13.5) on the bottom of the enclosure allow for easy installation of the power and video cables.

**Figure for wall mounting**

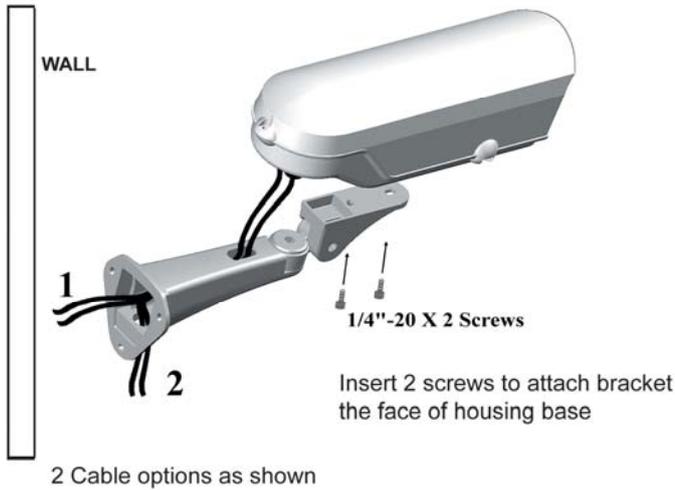

## GENERAL

Construction Entirely made of die-cast aluminum alloy

Finish RAL 9010 color of UV rays resistant powder coat

Environment Totally protected against dust and any water from all directions

## Weight

VISUS CITY 124H 5.25 lb (2.38 kg)

VISUS CITY 230H 5.25 lb (2.38 kg)

VISUS CITY 12HB 5.68 lb (2.58 kg)

VISUS CITY 24HB 5.68 lb (2.58 kg)

## MECHANICAL

Window 4 mm thick tempered glass  
82 x 68 mm ( W X H ) in viewing

Enclosure	Length base	340 mm
	overall	375 mm
	Width	145 mm,
	Height	110 mm

Internal usable area


250 mm	length
110 mm	Width
70 mm	Height

Certification Meets international IP68 standard

Camera mount Slot plate for adjustable camera positioning

Certification Meets international IP68 standard

Cable Entry 2 X PG 13.5 IP68 rating cable glands


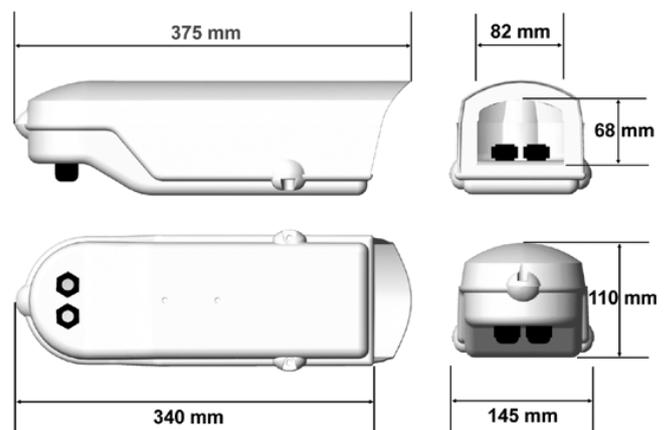


## MECHANICAL

- Bracket** Robust wall mounting design ,  
Length 330 mm
- Fully adjustable swivel head by 2 stainless steel allen-head screws
- Very good resistance to swaying
- Tilt angle of +40° to -150°;
- Pan angle of +100° to -100°
- Load rating: 76 lb (30kg)

## ELECTRICAL

- Heater control** Below 15°±3°C automatic turning on  
Above 25°±3°C automatic turning off
- Blower control** Above 35°±3°C automatic turning on  
Below 25°±3°C automatic turning off
- Terminal block** Fuse input ( Max. 400V )

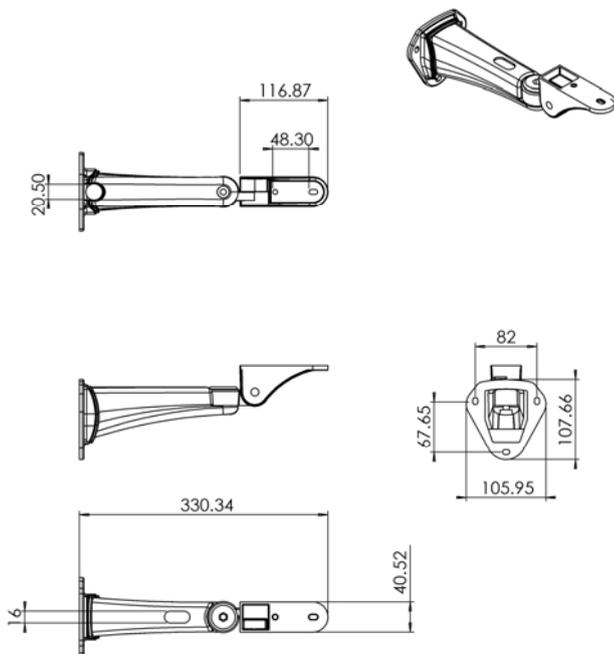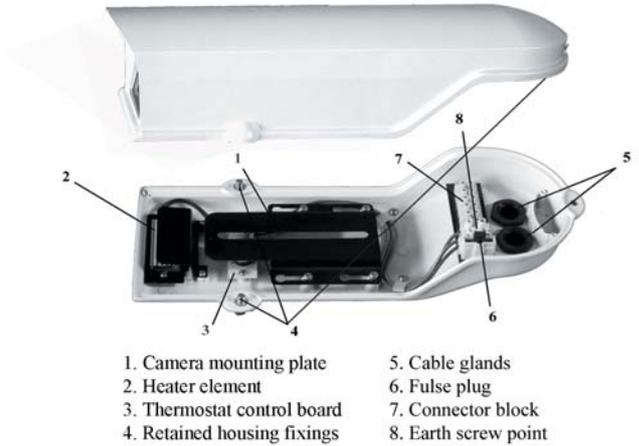

## VISUS CITY Series

MODEL	Basic Enclosure & Mount	Heater 12Vdc / 24Vac	Heater 100 ~ 240Vac	Blower 12Vdc	Blower 24Vac	Max. Consumption
VISUS CITY 124H	◆	◆				30W
VISUS CITY 230H	◆		◆			40W
VISUS CITY 12HB	◆	◆		◆		34W
VISUS CITY 24HB	◆	◆			◆	34W