

# DrayTek

## Vigor2130 Series High Speed Gigabit Router



### Quick Start Guide

V:1.5



# **Vigor2130 Series High Speed Gigabit Router Quick Start Guide**

**Version: 1.5**

**Firmware: V1.5.0.1**

**Date: 10/01/2011**



## Copyright Information

### Copyright Declarations

Copyright 2011 All rights reserved. This publication contains information that is protected by copyright. No part may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language without written permission from the copyright holders.

### Trademarks

The following trademarks are used in this document:

- Microsoft is a registered trademark of Microsoft Corp.
- Windows, Windows 95, 98, Me, NT, 2000, XP, Vista and Explorer are trademarks of Microsoft Corp.
- Apple and Mac OS are registered trademarks of Apple Inc.
- Other products may be trademarks or registered trademarks of their respective manufacturers.

## Safety Instructions and Approval

### Safety Instructions

- Read the installation guide thoroughly before you set up the router.
- The router is a complicated electronic unit that may be repaired only by authorized and qualified personnel. Do not try to open or repair the router yourself.
- Do not place the router in a damp or humid place, e.g. a bathroom.
- Do not stack the routers.
- The router should be used in a sheltered area, within a temperature range of +5 to +40 Celsius.
- Do not expose the router to direct sunlight or other heat sources. The housing and electronic components may be damaged by direct sunlight or heat sources.
- Do not deploy the cable for LAN connection outdoor to prevent electronic shock hazards.
- Keep the package out of reach of children.
- When you want to dispose of the router, please follow local regulations on conservation of the environment.

### Warranty

We warrant to the original end user (purchaser) that the router will be free from any defects in workmanship or materials for a period of two (2) years from the date of purchase from the dealer. Please keep your purchase receipt in a safe place as it serves as proof of date of purchase. During the warranty period, and upon proof of purchase, should the product have indications of failure due to faulty workmanship and/or materials, we will, at our discretion, repair or replace the defective products or components, without charge for either parts or labor, to whatever extent we deem necessary to restore the product to proper operating condition. Any replacement will consist of a new or re-manufactured functionally equivalent product of equal value, and will be offered solely at our discretion. This warranty will not apply if the product is modified, misused, tampered with, damaged by an act of God, or subjected to abnormal working conditions. The warranty does not cover the bundled or licensed software of other vendors. Defects which do not significantly affect the usability of the product will not be covered by the warranty. We reserve the right to revise the manual and online documentation and to make changes from time to time in the contents hereof without obligation to notify any person of such revision or changes.

### Be a Registered Owner

Web registration is preferred. You can register your Vigor router via <http://www.draytek.com>.

### Firmware & Tools Updates

Due to the continuous evolution of DrayTek technology, all routers will be regularly upgraded. Please consult the DrayTek web site for more information on newest firmware, tools and documents.

<http://www.draytek.com>

## European Community Declarations

Manufacturer: DrayTek Corp.  
Address: No. 26, Fu Shing Road, HuKou Township, HsinChu Industrial Park, Hsin-Chu, Taiwan  
303  
Product: Vigor2130 Series Router

DrayTek Corp. declares that Vigor2130 Series of routers are in compliance with the following essential requirements and other relevant provisions of R&TTE Directive 1999/5/EEC.

The product conforms to the requirements of Electro-Magnetic Compatibility (EMC) Directive 2004/108/EC by complying with the requirements set forth in EN55022/Class B and EN55024/Class B.

The product conforms to the requirements of Low Voltage (LVD) Directive 2006/95/EC by complying with the requirements set forth in EN60950-1.

## Regulatory Information

### Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device may accept any interference received, including interference that may cause undesired operation.

Please visit <http://www.draytek.com/user/AboutRegulatory.php>



This product is designed for 2.4GHz WLAN network throughout the EC region and Switzerland with restrictions in France. Please see the user manual for the applicable networks on your product.

# Table of Contents

<b>1. Introduction.....</b>	<b>1</b>
1.1 Panel Explanation .....	2
1.1.1 For Vigor2130 .....	2
1.1.2 For Vigor2130n .....	4
1.1.3 For Vigor2130Vn .....	6
1.2 Package Content.....	8
<b>2. Installing Your Router.....</b>	<b>9</b>
2.1 Hardware Installation.....	9
Stand Installation.....	10
2.2 Printer Installation.....	11
<b>3. Configuring Web Pages .....</b>	<b>17</b>
3.1 Accessing Web Page .....	17
3.2 Basic Configuration .....	18
<b>4. Trouble Shooting.....</b>	<b>27</b>
4.1 Checking If the Hardware Status Is OK or Not.....	27
4.2 Checking If the Network Connection Settings on Your Computer Is OK or Not .....	28
4.3 Pinging the Router from Your Computer .....	30
4.4 Checking If the ISP Settings are OK or Not .....	31
4.5 Backing to Factory Default Setting If Necessary.....	32
4.6 Contacting Your Dealer .....	33




# 1. Introduction

The Vigor2130 series are the routers with high speed in data transmission through WAN port and LAN ports. With hardware NAT acceleration, the rate of Vigor2130 series can be greater than 900 Mbps almost.

With the development of NGN (Next Generation Network), you may recently hear the news about FTTx deployment in your local area or even have already subscribed the unbundling last mile service (e.g. VDSL2) from local ITSP for FTTx. As adopting FTTx, the main question for end users is whether your legacy router could fully utilize its bandwidth or not.

For example, you purchase a 120 Mbps Internet connection from your ISP but your existing router cannot support 90 Mbps throughput. That's why DrayTek launches Vigor 2130 series – High speed Gigabit router, perfectly complied with VDSL2 environment including Vigor2130, Vigor2130n and Vigor2130Vn for speed-wanted customers. With high throughput performance and secured broadband connectivity provided by Vigor 2130 series, you can simultaneously engage these bandwidth-intensive applications, such as high-definition video streaming, online gaming, and Internet telephony / access.

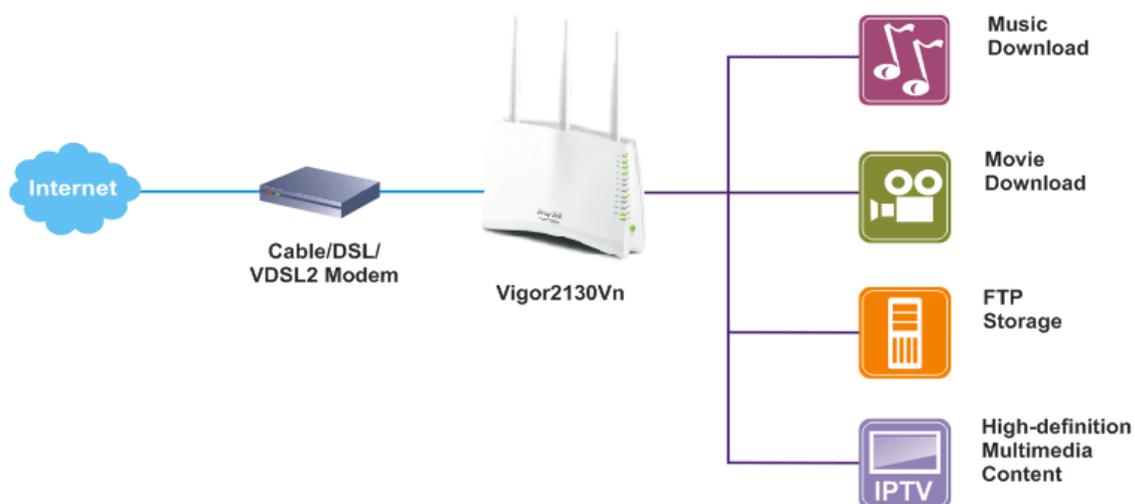

Vigor2130 supports up to 2 VPN tunnels using advanced protocols such as IPSec/PPTP (for remote dial-in only) with AES/3DES for encryption and MD5/SHA-1 for authentication.



Vigor2130 'n' models comply with 802.11n Draft-n standards. They support WEP/WPA/WPA2 encryption and MAC Address Control.

Vigor2130 'V' models provide two analogue phone connectors. It supports multiple SIP registrars with high flexible configuration and call handing options.

In addition, Vigor2130 series supports two USB interfaces for connecting USB printer to share printer or USB storage device for sharing files and 3G backup service. Vigor2130 series provides two-level management to simplify the configuration of network connection. The user mode allows user accessing into WEB interface via simple configuration. However, if users want to have advanced configurations, they can access into WEB interface through admin mode.


# 1.1 Panel Explanation

## 1.1.1 For Vigor2130

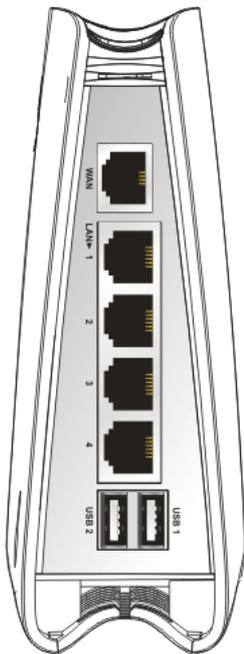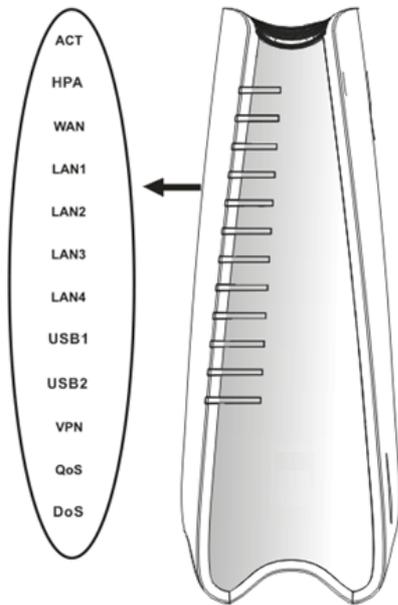



LED	Status	Explanation
ACT (Activity)	Blinking	The router is powered on and running normally.
	Off	The router is powered off.
HPA (Hardware Packet Accelerate)	On	Hardware NAT is enabled.
	Off	Hardware NAT is disabled.
WAN	On	The WAN port is connected.
	Blinking	It will blink while transmitting data.
LAN1/2/3/4	On	The port is connected.
	Off	The port is disconnected.
	Blinking	The data is transmitting.
USB1/2	On	A USB device is connected and active.
VPN	On	The VPN tunnel is active.
QoS	On	The QoS function is active.
DoS	On	The DoS/DDoS function is active.

Interface	Description
WAN	Connector for accessing the Internet.
LAN (1-4)	Connectors for local networked devices.
USB (1-2)	Connector for USB storage device (Pen Driver/Mobile HD) or printer or 3G backup.

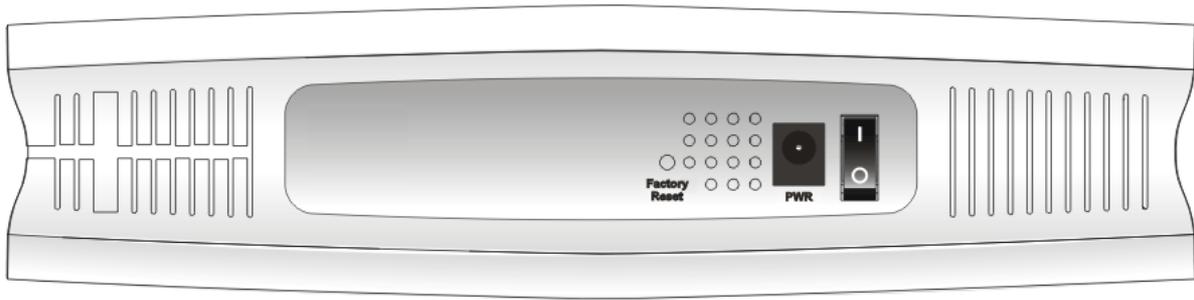


Interface	Description
Factory Reset	Restore the default settings. Usage: Turn on the router (ACT LED is blinking). Press the hole and keep for more than 5 seconds. When you see the ACT LED begins to blink rapidly than usual, release the button. Then the router will restart with the factory default configuration.
PWR	Connector for a power adapter.
ON/OFF	Power switch.

## 1.1.2 For Vigor2130n

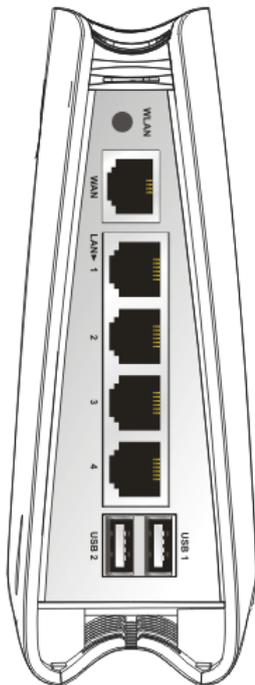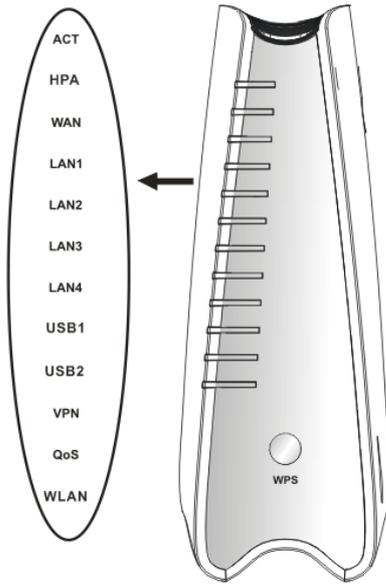



LED	Status	Explanation
ACT (Activity)	Blinking	The router is powered on and running normally.
	Off	The router is powered off.
HPA (Hardware Packet Accelerate)	On	Hardware NAT is enabled.
	Off	Hardware NAT is disabled.
WAN	On	The WAN port is connected.
	Blinking	It will blink while transmitting data.
LAN1/2/3/4	On	The port is connected.
	Off	The port is disconnected.
	Blinking	The data is transmitting.
USB1/2	On	A USB device is connected and active.
VPN	On	The VPN tunnel is active.
QoS	On	The QoS function is active.
WLAN	On	Wireless access point is ready.
WPS Button	On	Press this button for 2 seconds to wait for client device making network connection through WPS. When the LED lights up, the WPS connection will be on.
	Off	The WPS is off.

Interface	Description
WLAN	Press the button once to enable (WLAN LED on) or disable (WLAN LED off) wireless connection.
WAN	Connector for accessing the Internet.
LAN (1-4)	Connectors for local networked devices.
USB (1-2)	Connector for USB storage device (Pen Drive/Mobile HD) or printer or 3G backup.

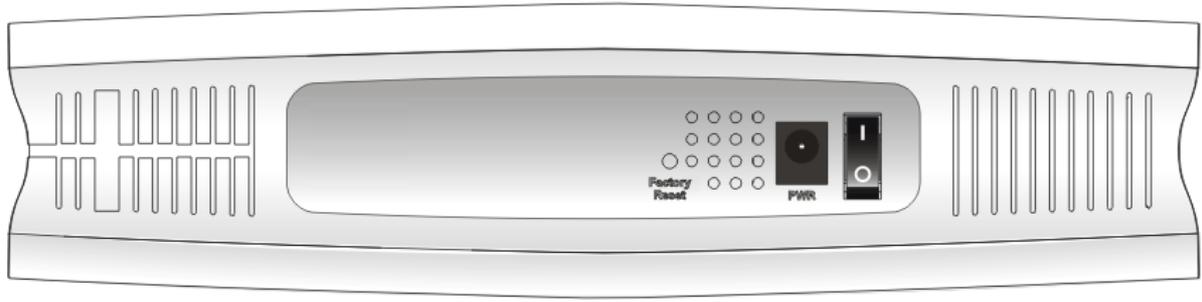


Interface	Description
Factory Reset	Restore the default settings. Usage: Turn on the router (ACT LED is blinking). Press the hole and keep for more than 5 seconds. When you see the ACT LED begins to blink rapidly than usual, release the button. Then the router will restart with the factory default configuration.
PWR	Connector for a power adapter.
ON/OFF	Power switch.

### 1.1.3 For Vigor2130Vn

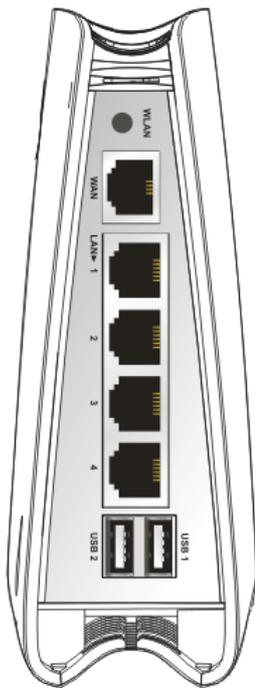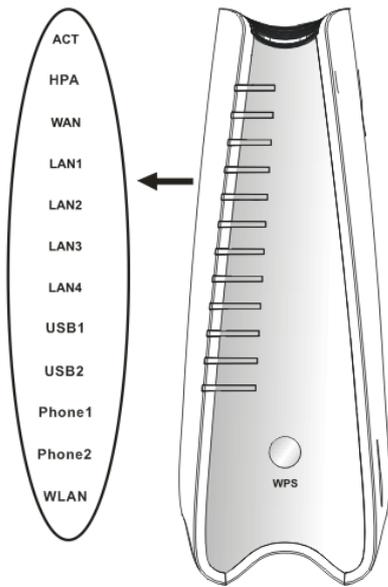


LED	Status	Explanation
ACT (Activity)	Blinking	The router is powered on and running normally.
	Off	The router is powered off.
HPA (Hardware Packet Accelerate)	On	Hardware NAT is enabled.
	Off	Hardware NAT is disabled.
WAN	On	The WAN port is connected.
	Blinking	It will blink while transmitting data.
LAN1/2/3/4	On	The port is connected.
	Off	The port is disconnected.
	Blinking	The data is transmitting.
USB1/2	On	A USB device is connected and active.
	Blinking	The data is transmitting.
Phone1/ Phone2	On	The phone connected to this port is off-hook.
	Off	The phone connected to this port is on-hook.
	Blinking	A phone call comes.
WLAN	On	Wireless access point is ready.
WPS Button	On	Press this button for 2 seconds to wait for client device making network connection through WPS. When the LED lights up, the WPS connection will be on.
	Off	The WPS is off.

Interface	Description
WLAN	Press the button once to enable (WLAN LED on) or disable (WLAN LED off) wireless connection.
WAN	Connector for accessing the Internet.
LAN (1-4)	Connectors for local networked devices.
USB (1-2)	Connector for USB storage device (Pen Driver/Mobile HD) or printer or 3G backup.

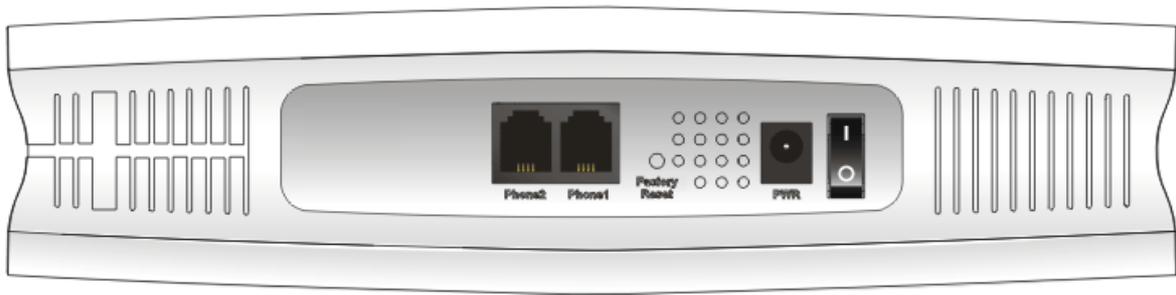


Interface	Description
Phone2/Phone1	Connector of analog phone for VoIP communication.
Factory Reset	Restore the default settings. Usage: Turn on the router (ACT LED is blinking). Press the hole and keep for more than 5 seconds. When you see the ACT LED begins to blink rapidly than usual, release the button. Then the router will restart with the factory default configuration.
PWR	Connector for a power adapter.
ON/OFF	Power switch.


## 1.2 Package Content




**1** Quick Start Guide




**2** CD



**3** RJ-45 Cable (Ethernet)




**4** Antenna (n models)

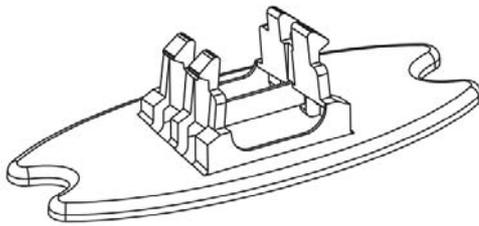


**5** Stand


- 6** The type of the power adapter depends on the country that the router will be installed.  
\* The maximum power consumption is *17-23 Watt*.

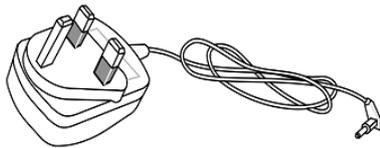


**UK-type Power Adapter**

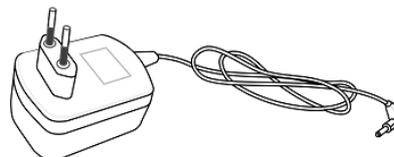

**EU-type Power Adapter**

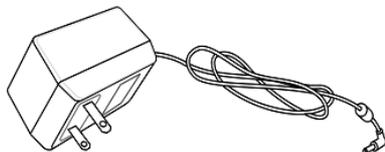

**USA/Taiwan-type Power Adapter**

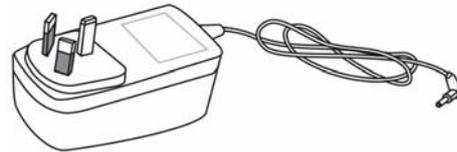

**AU/NZ-type Power Adapter**


## 2. Installing Your Router

This section will guide you to install the router through hardware connection and configure the router's settings through web browser.

### 2.1 Hardware Installation

Before starting to configure the router, you have to connect your devices correctly.

1. Connect this device to a modem with a RJ-45 cable.
2. Connect one port of 4-port switch to your computer with a RJ-45 cable. This device allows you to connect 4 PCs directly.
3. Connect Phone port to a conventional analog telephone.
4. Connect detachable antennas to the router for Vigor2130 series (n model).
5. Connect one end of the power cord to the power port of this device. Connect the other end to the wall outlet of electricity.
6. Power on the router.
7. Check the **ACT** and **WAN**, **LAN** LEDs to assure network connections.

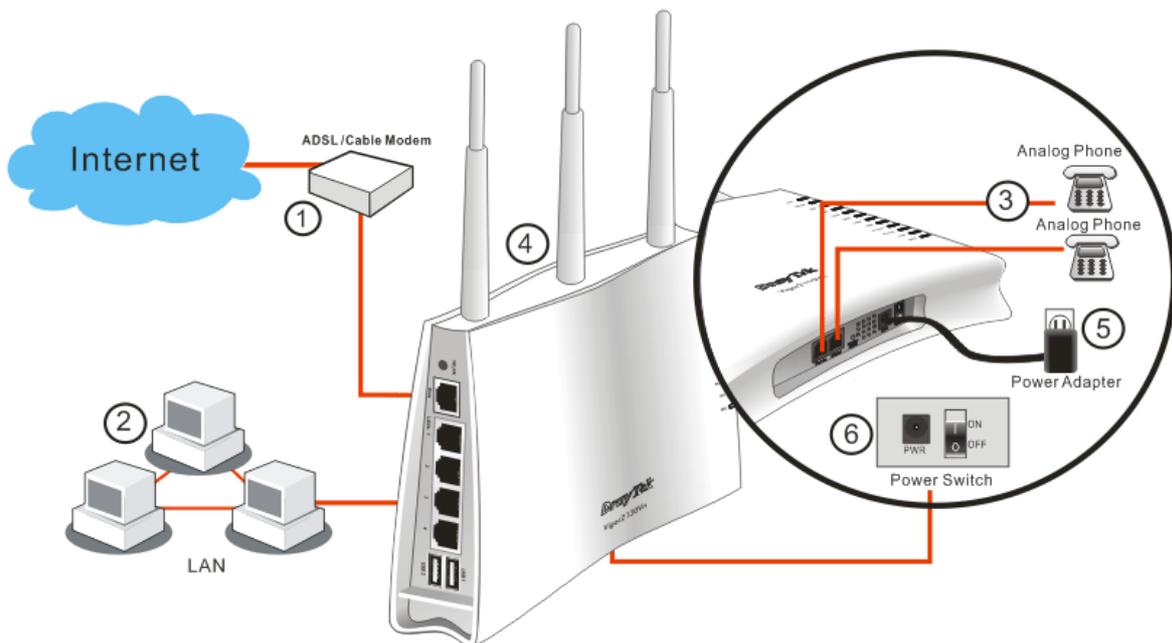


(For the detailed information of LED status, please refer to section 1.1.)


## Stand Installation

The Vigor2130 must be placed erectly. Therefore you have to install a stand onto the router to make it standing firmly. Please follow the figures listed below to finish the installation.


①

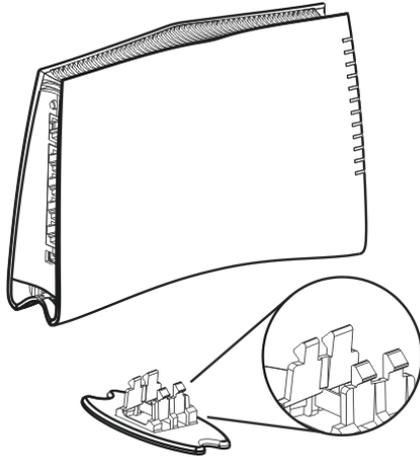


②

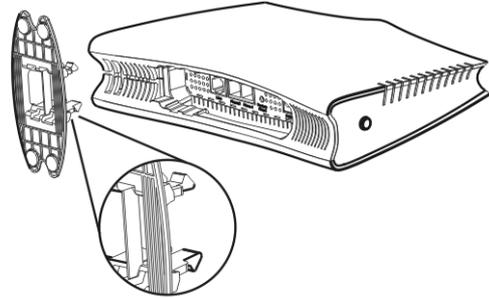

③

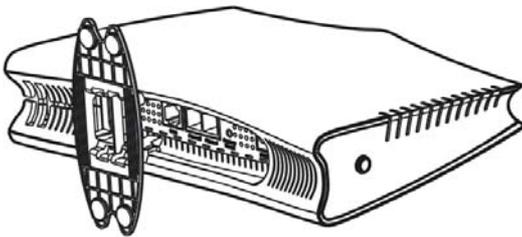


④

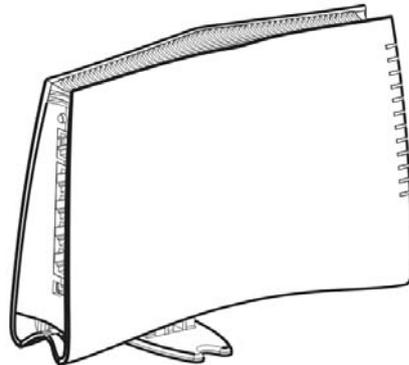


## 2.2 Printer Installation

You can install a printer onto the router for sharing printing. All the PCs connected this router can print documents via the router. The example provided here is made based on Windows XP/2000. For Windows 98/SE/Vista, please visit [www.draytek.com](http://www.draytek.com).

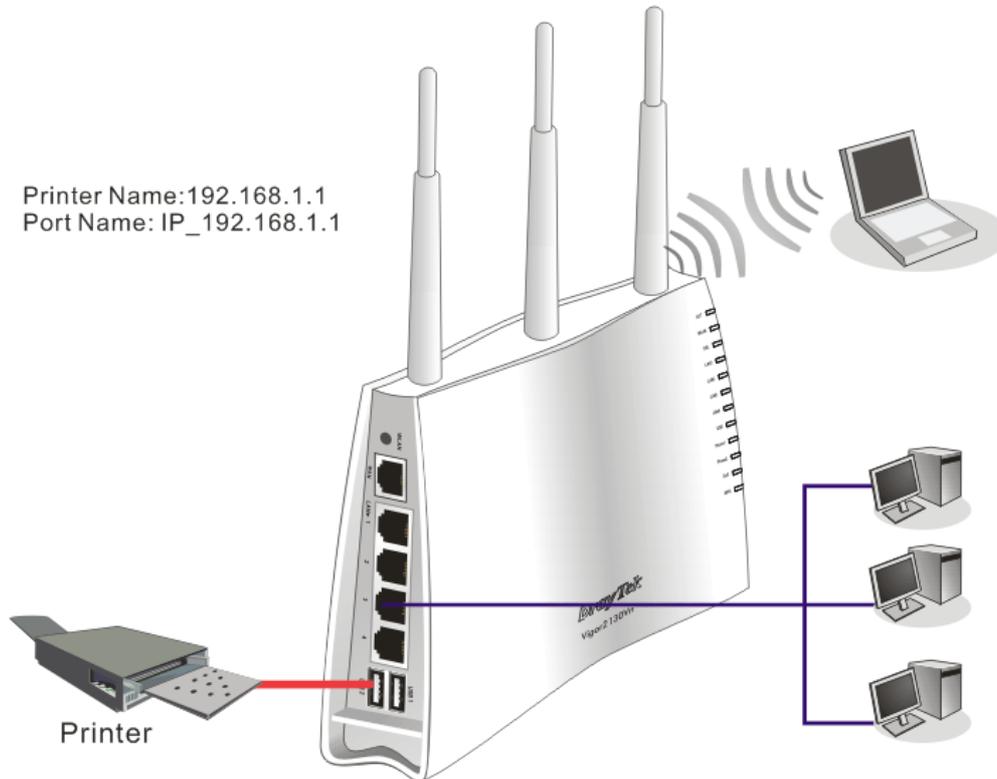


Before using it, please follow the steps below to configure settings for connected computers (or wireless clients).

1. Connect the printer with the router through USB port.
2. Open **Start->Settings-> Printer and Faxes**.

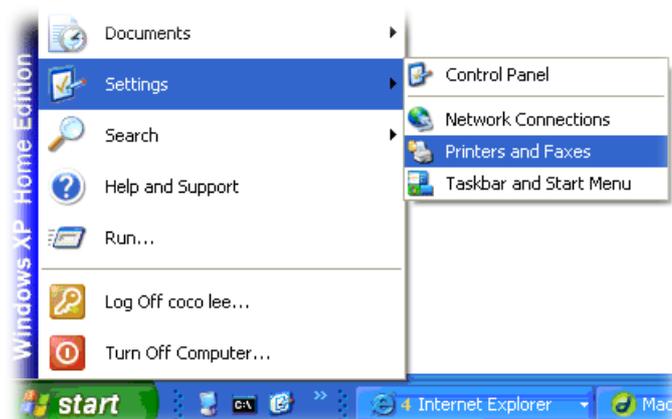

3. Open **File->Add a New Computer**. A welcome dialog will appear. Please click **Next**.

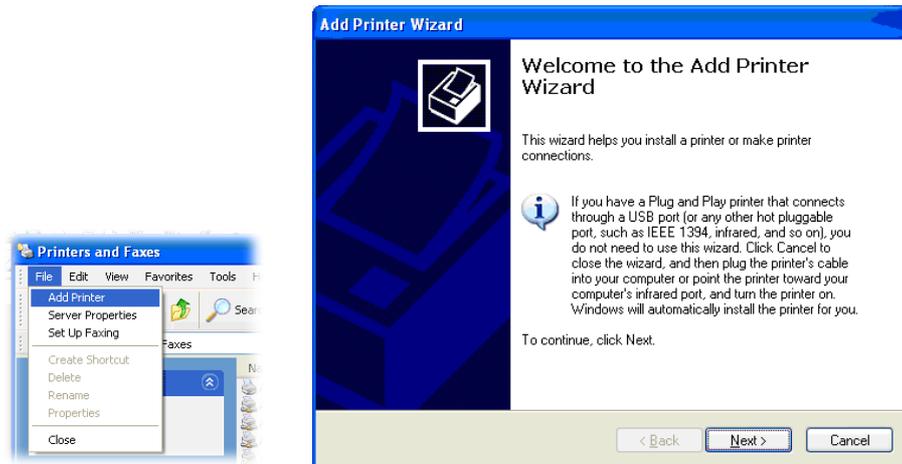


4. Click **Local printer attached to this computer** and click **Next**.




5. In this dialog, choose **Create a new port Type of port** and use the drop down list to select **Standard TCP/IP Port**. Click **Next**.



6. In the following dialog, type **192.168.1.1** (router's LAN IP) in the field of **Printer Name or IP Address** and type **IP\_192.168.1.1** as the port name. Then, click **Next**.

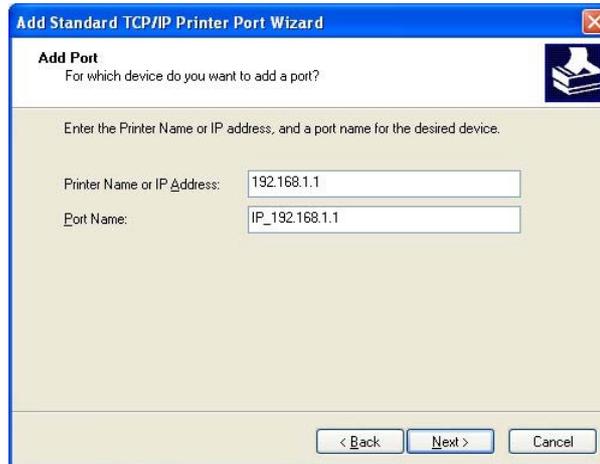


7. Click **Standard** and choose **Generic Network Card**.

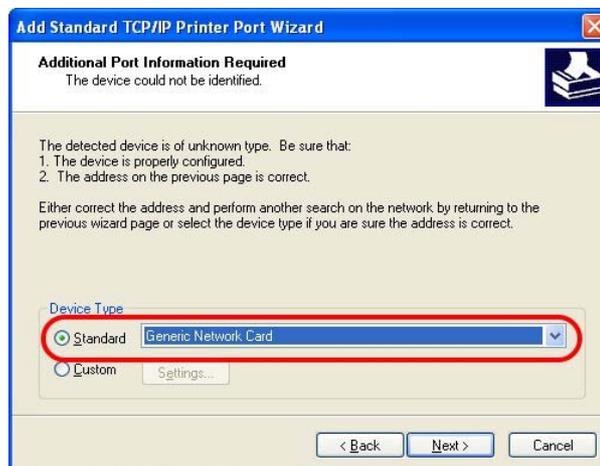


8. Then, in the following dialog, click **Finish**.




- Now, your system will ask you to choose right name of the printer that you installed onto the router. Such step can make correct driver loaded onto your PC. When you finish the selection, click **Next**.

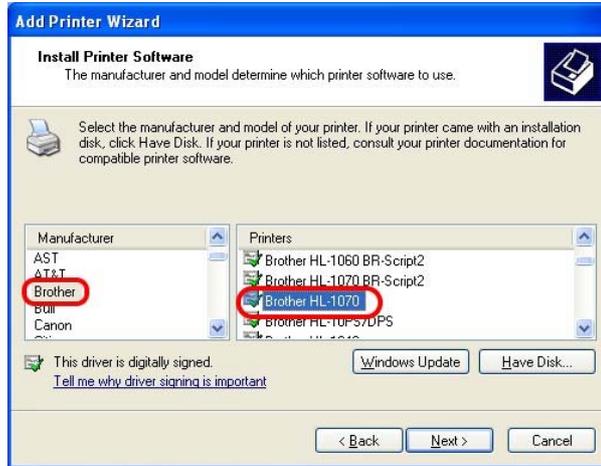

- For the final stage, you need to go back to **Control Panel-> Printers** and edit the property of the new printer you have added.


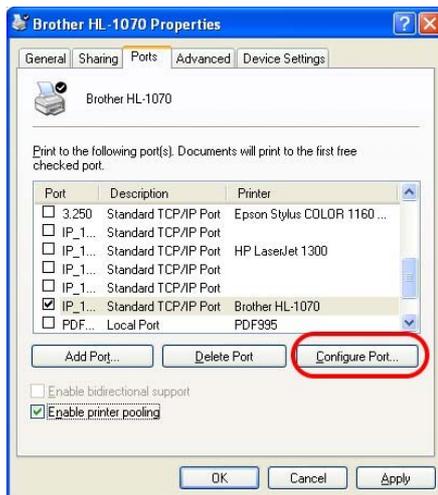


- Select "**LPR**" on Protocol, type **p1** (number 1) as Queue Name. Then click **OK**. Next please refer to the red rectangle for choosing the correct protocol and UPR name.

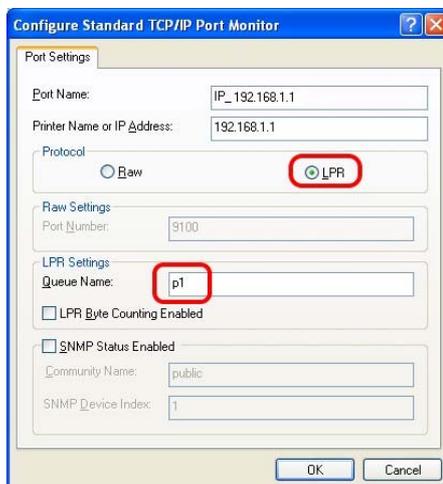

The printer can be used for printing now. Most of the printers with different manufacturers are compatible with vigor router.

**Note 1:** Some printers with the fax/scanning or other additional functions are not supported. If you do not know whether your printer is supported or not, please visit [www.draytek.com](http://www.draytek.com) to find out the printer list. Open **Support >FAQ**; find out the link of **Printer Server** and click it; then click the **What types of printers are compatible with Vigor router?** link.

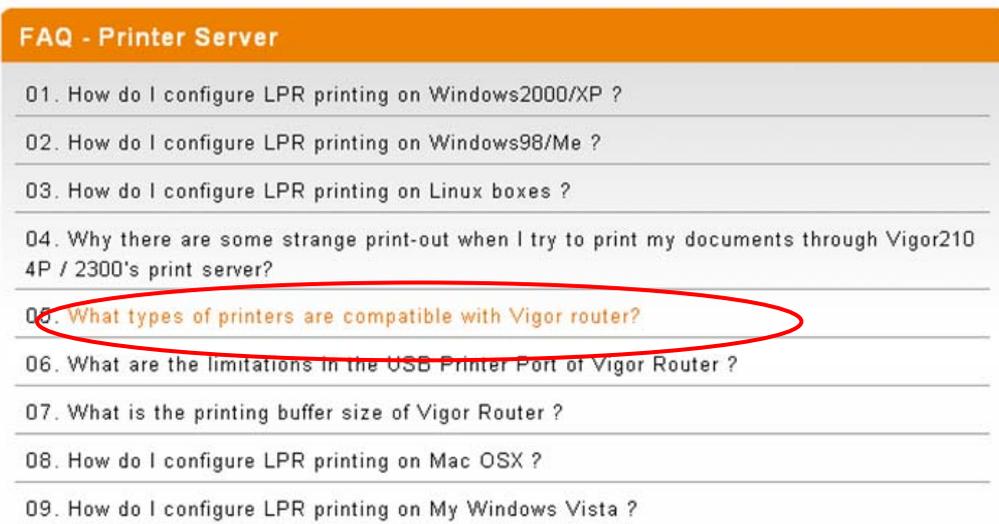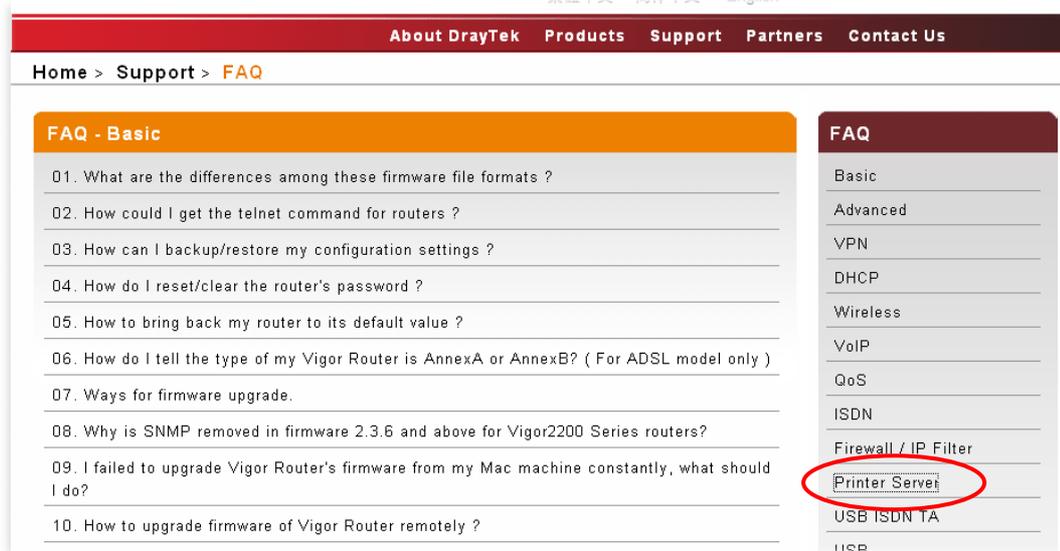

**Note 2:** Vigor router supports printing request from computers via LAN ports but not WAN port.

This page is left blank.

## 3. Configuring Web Pages

To access Internet, please finish basic configuration after completing the hardware installation.

### 3.1 Accessing Web Page

1. Make sure your PC connects to the router correctly.



---

**Notice:** You may either simply set up your computer to get IP dynamically from the router or set up the IP address of the computer to be the same subnet as **the default IP address of Vigor router 192.168.1.1**. For the detailed information, please refer to the later section - Trouble Shooting of the guide.

---

2. Open a web browser on your PC and type **http://192.168.1.1**. The following window will be open to ask for username and password.

Username   
Password   
Login

Copyright©, DrayTek Corp. All Rights Reserved. **DrayTek**

3. For user mode, do not type any word on the window and click **Login** for the simple configuration. Yet, for admin mode, please type “admin/admin” on Username/Password and click **Login** for full configuration.




---

**Notice:** If you fail to access to the web configuration, please go to “Trouble Shooting” for detecting and solving your problem.

---

4. The web page can be logged out according to the chosen condition. The default setting is **Auto Logout**, which means the web configuration system will logout after five minutes without any operation. Change the setting for your necessity.



## 3.2 Basic Configuration

The **Quick Start Wizard** is designed for you to easily set up your router for Internet access. You can directly access the **Quick Start Wizard** via Web Configurator.

1. Open a web browser on your PC and type **http://192.168.1.1**. The system will ask you to type username/password. The displayed web pages will change according to the username and password typed. Here we take simple web pages for example. So, do not type any word on the window and click **Login**.



**Notice:** For advanced configuration (admin mode), please refer to User's Guide for more detailed information.

2. Now, the **Main Screen** for user operation will appear. Click **Quick Start Wizard**.

The screenshot shows the main configuration page of a Vigor2130 Series router. The left sidebar contains a navigation menu with 'Quick Start Wizard' highlighted. The main area displays system status and configuration details for various components like System, VoIP, and WAN.

The home page will change slightly in accordance with the router you have.

3. The welcome page will be shown as below. Please click **Next**.

### Quick Start Wizard

#### Welcome to the Quick Start Wizard!

The next steps will guide you through a basic setup of the device.  
If you want more advanced setup you should consider setting the device up manually.

- Step 1: Setup the Password
- Step 2: Setup the Timezone
- Step 3: Setup the Internet connection (WAN)
- Step 4: Setup the Wireless (Wi-Fi)
- Step 5: Save the configuration

< Back

Next >

Finish

Cancel

4. Enter the login password on the field of **New Password** and retype it on the field of **Confirm Password**. Then click **Next** to continue. After restarting the router, new password must be typed for accessing into router web page.

**Quick Start Wizard**

---

**System Password**

New Password	<input type="text"/>
Confirm Password	<input type="text"/>

5. On the next page as shown below, please choose time zone for your router. Then click **Next** for next step.

**Quick Start Wizard**

---

**Time Configuration**

Time Zone	<input type="text" value="UTC"/>
-----------	----------------------------------

6. On the next page as shown below, please select the appropriate Internet access type **according to the information from your ISP**. For example, you should select PPPoE mode if the ISP provides you PPPoE interface.

Quick Start Wizard

---

**WAN IP Configuration**

Connection Type	DHCP
<b>Clone MAC Address</b>	
Enable	<input type="checkbox"/>

DHCP

Static IP

**DHCP**

PPPoE

PPTP

L2TP

**Static IP:** if you click Static IP, you will get the following page. Please type in the IP address information originally provided by your ISP. Then click **Next** for next step.

Quick Start Wizard

---

**WAN IP Configuration**

Connection Type	Static IP
<b>Static IP</b>	
IP Address	172.16.3.229
Subnet Mask	255.255.0.0
Gateway	172.16.3.4
Primary DNS Server	0.0.0.0
Secondary DNS Server	0.0.0.0
<b>Clone MAC Address</b>	
Enable	<input type="checkbox"/>

**DHCP:** if you click DHCP, you will get the following page. Simply click **Next** to continue.

**Quick Start Wizard**

---

**WAN IP Configuration**

Connection Type	DHCP
<b>Clone MAC Address</b>	
Enable	<input checked="" type="checkbox"/> Clone MAC Address
MAC Address	00-0E-A6-2A-D5-A1

< Back   Next >   Finish   Cancel

**PPPoE:** if you click PPPoE as the protocol, please manually enter the Username/Password provided by your ISP and all the required information. Then, click **Next**.

**Quick Start Wizard**

---

**WAN IP Configuration**

Connection Type	PPPoE
<b>PPPoE</b>	
Username	<input type="text"/>
Password	<input type="text"/>
Confirm Password	<input type="text"/>
Redial Policy	Always On
MTU Size	<input type="text"/>
<b>Clone MAC Address</b>	
Enable	<input type="checkbox"/>

< Back   Next >   Finish   Cancel

**PPTP/L2TP:** if you click PPTP/L2TP as the protocol, please manually enter the Username/Password provided by your ISP and all the required information. Then, click **Next**.

**Quick Start Wizard**

**WAN IP Configuration**

Connection Type	PPTP
<b>PPTP Settings</b>	
Username	<input type="text"/>
Password	<input type="text"/>
Server Address	<input type="text"/>
WAN IP Network Settings	Static IP
IP Address	172.16.3.102
Subnet Mask	255.255.0.0
Redial Policy	Always On
MTU Size	<input type="text"/>
<b>Clone MAC Address</b>	
Enable	<input type="checkbox"/>

< Back   Next >   Finish   Cancel

7. In an Infrastructure Mode of wireless network, Vigor wireless router plays a role as an **Access Point (AP)** connecting to lots of wireless clients or Stations (STA). All the STAs (clients) will share the same Internet connection with other wired hosts via Vigor wireless router. Fore wireless connection, please configure the parameters listed in this page. Then, click **Next**. For the user of Vigor2130, please skip this step.


**Quick Start Wizard**

**Wireless System Configuration**

Enable Wireless LAN	<input checked="" type="checkbox"/>
SSID Broadcast	Show
SSID	DrayTek
<b>Wireless Security Configuration</b>	
Encryption	None

< Back   Next >   Finish   Cancel

Select an appropriate encryption mode to improve the security and privacy of your wireless data packets.



**WEP:** if you choose WEP as the security configuration, you have to specify encryption key and authentication mode.

## Quick Start Wizard

### Wireless System Configuration

Enable Wireless LAN	<input checked="" type="checkbox"/>
SSID Broadcast	Show
SSID	DrayTek
<b>Wireless Security Configuration</b>	
Encryption	WEP
<b>WEP Configuration</b>	
Default Key	Key1
Key1	
Key2	
Key3	
Key4	
Authentication Mode	OPEN

< Back   Next >   Finish   Cancel

**WPA-PSK:** if you choose WPA-PSK as the security configuration, you have to specify WPA mode, algorithm and pre-shared key.

## Quick Start Wizard

### Wireless System Configuration

Enable Wireless LAN	<input checked="" type="checkbox"/>
SSID Broadcast	Show
SSID	DrayTek
<b>Wireless Security Configuration</b>	
Encryption	WPA-PSK
<b>WPA-PSK Configuration</b>	
Type	WPA
WPA Algorithm	TKIP
WPA Pre-Shared Key	

< Back   Next >   Finish   Cancel

**WPA-RADIUS:** if you choose WPA-Radius as the security configuration, you have to specify WPA mode, algorithm, Radius server, Radius server port and Radius server secret respectively.

**Quick Start Wizard**

**Wireless System Configuration**

Enable Wireless LAN	<input checked="" type="checkbox"/>
SSID Broadcast	Show
SSID	DrayTek
<b>Wireless Security Configuration</b>	
Encryption	WPA-RADIUS
<b>WPA-RADIUS Configuration</b>	
Type	WPA
WPA Algorithm	TKIP
Server IP Address	0.0.0.0
Destination Port	1812
Shared Secret	radius_secret

**WPS:** if you choose WPS as the security configuration, you can press Start WPS PIN and Start WPS PBC to complete the wireless connection.

**Quick Start Wizard**

**Wireless System Configuration**

Enable Wireless LAN	<input checked="" type="checkbox"/>
SSID Broadcast	Show
SSID	DrayTek
<b>Wireless Security Configuration</b>	
Encryption	WPS
<b>WPS Configuration</b>	
Configure via Push Button	<input style="margin-right: 100px;" type="button" value=" Start PBC "/>
Configure via Client PinCode	<input style="width: 50px;" type="text"/> <input style="margin-left: 100px;" type="button" value=" Start PIN "/>

8. Click **Next** to continue. Now you can see the following screen. It indicates that the setup is complete. Different types of connection modes will have different summary. Click **Finish** and then restart the router.

**Quick Start Wizard**

---

**Vigor Wizard Setup is now finished!**

Press **Finish** button to save and finish the wizard setup.  
You will be prompted for the new password.  
Note that the configuration process takes a few seconds to complete.

Now, you can enjoy surfing on the Internet.

This page is left blank.

## 4. Trouble Shooting

This section will guide you to solve abnormal situations if you cannot access into the Internet after installing the router and finishing the web configuration. Please follow sections below to check your basic installation status stage by stage.


- Checking if the hardware status is OK or not.
- Checking if the network connection settings on your computer are OK or not.
- Pinging the router from your computer.
- Checking if the ISP settings are OK or not.
- Backing to factory default setting if necessary.

If all above stages are done and the router still cannot run normally, it is the time for you to contact your dealer for advanced help.

### 4.1 Checking If the Hardware Status Is OK or Not

Follow the steps below to verify the hardware status.

1. Check the power line and LAN cable connections. Refer to “**2.1 Hardware Installation**” for details.
2. Turn on the router. Make sure the **ACT LED** blink once per second and the correspondent **LAN LED** is bright.

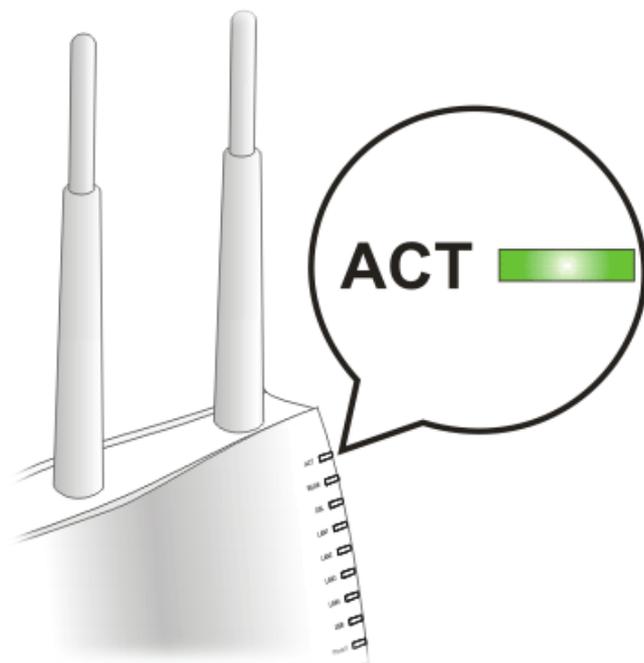

3. If not, it means that there is something wrong with the hardware status. Simply back to “**2.1 Hardware Installation**” to execute the hardware installation again. And then, try again.

## 4.2 Checking If the Network Connection Settings on Your Computer Is OK or Not

Sometimes the link failure occurs due to the wrong network connection settings. After trying the above section, if the link is still failed, please do the steps listed below to make sure the network connection settings is OK.

### For Windows




The example is based on Windows XP. As to the examples for other operation systems, please refer to the similar steps or find support notes in [www.draytek.com](http://www.draytek.com).


1. Go to **Control Panel** and then double-click on **Network Connections**.




2. Right-click on **Local Area Connection** and click on **Properties**.

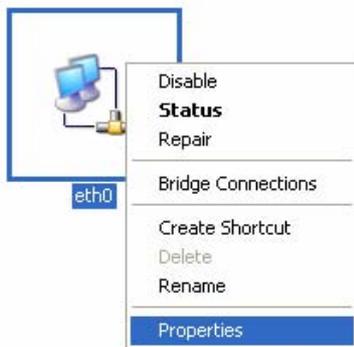

3. Select **Internet Protocol (TCP/IP)** and then click **Properties**.

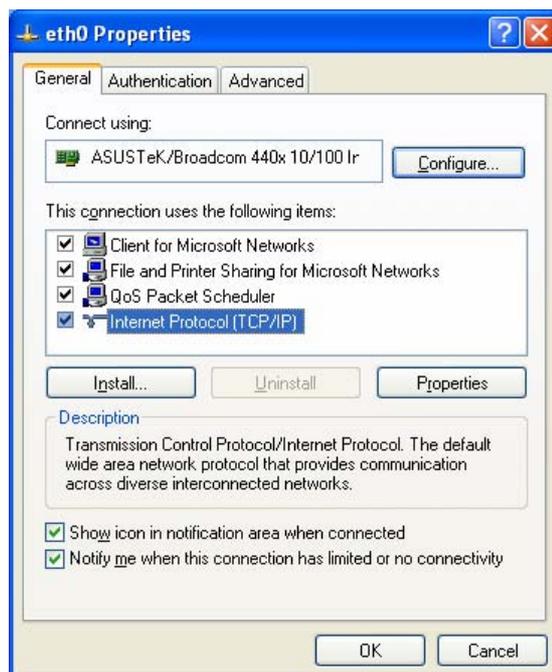


4. Select **Obtain an IP address automatically** and **Obtain DNS server address automatically**.

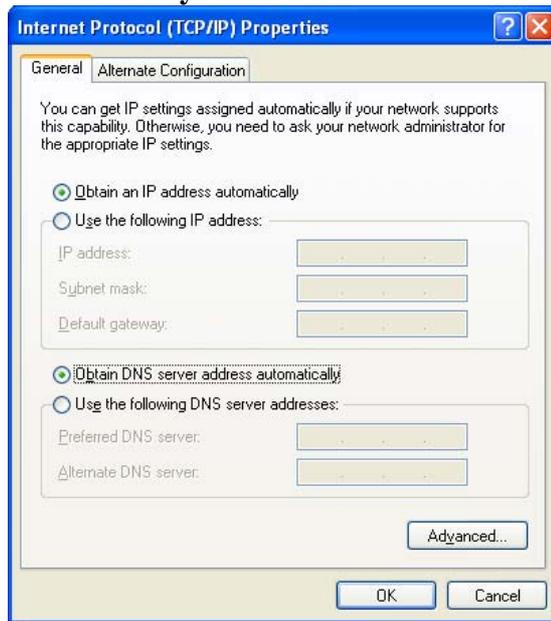

## For MacOs

1. Double click on the current used MacOs on the desktop.
2. Open the **Application** folder and get into **Network**.
3. On the **Network** screen, select **Using DHCP** from the drop down list of Configure IPv4.

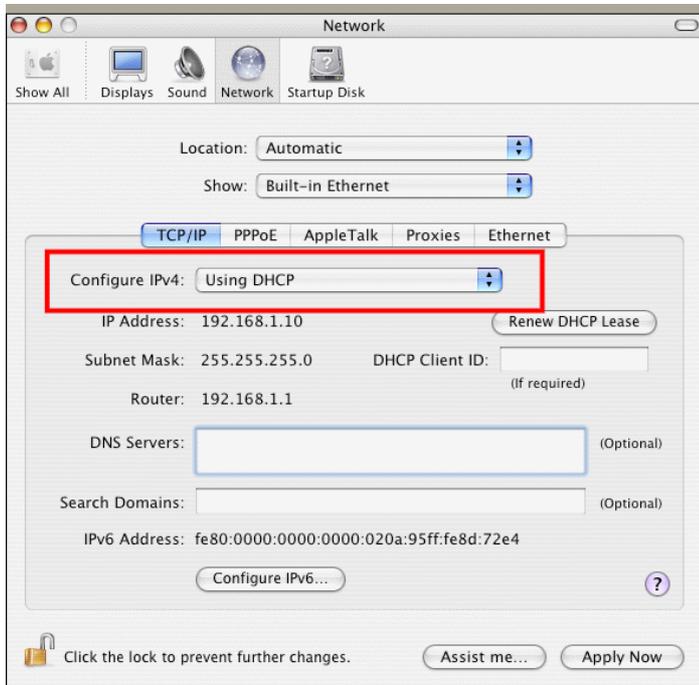


## 4.3 Pinging the Router from Your Computer

The default gateway IP address of the router is 192.168.1.1. For some reason, you might need to use “ping” command to check the link status of the router. **The most important thing is that the computer will receive a reply from 192.168.1.1.** If not, please check the IP address of your computer. We suggest you setting the network connection as **get IP automatically**. (Please refer to the section 4.2)

Please follow the steps below to ping the router correctly.

### For Windows

1. Open the **Command Prompt** window (from **Start menu> Run**).
2. Type **command** (for Windows 95/98/ME) or **cmd** (for Windows NT/2000/XP/Vista). The DOS command dialog will appear.

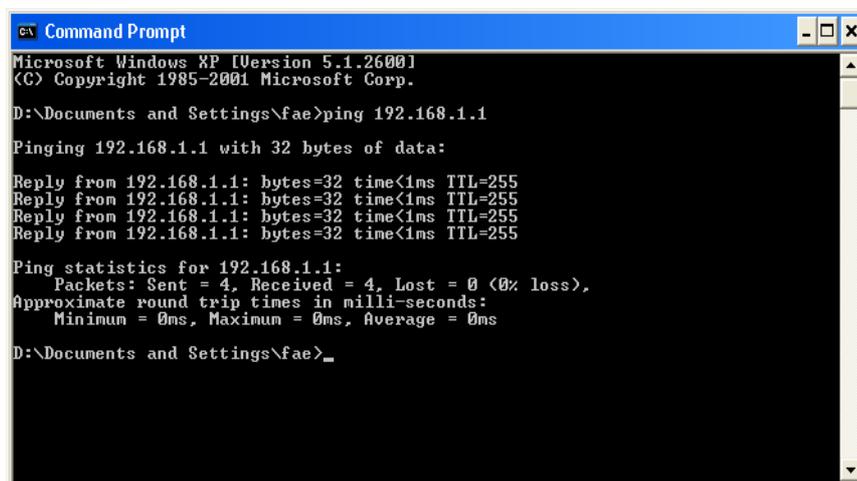

```
Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

D:\Documents and Settings\fae>ping 192.168.1.1

Pinging 192.168.1.1 with 32 bytes of data:

Reply from 192.168.1.1: bytes=32 time<1ms TTL=255

Ping statistics for 192.168.1.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

D:\Documents and Settings\fae>_
```

3. Type **ping 192.168.1.1** and press [Enter]. If the link is OK, the line of “**Reply from 192.168.1.1:bytes=32 time<1ms TTL=255**” will appear.
4. If the line does not appear, please check the IP address setting of your computer.

### For MacOs (Terminal)

1. Double click on the current used MacOs on the desktop.
2. Open the **Application** folder and get into **Utilities**.
3. Double click **Terminal**. The Terminal window will appear.
4. Type **ping 192.168.1.1** and press [Enter]. If the link is OK, the line of “**64 bytes from 192.168.1.1: icmp\_seq=0 ttl=255 time=xxxx ms**” will appear.

```

Terminal — bash — 80x24
Last login: Sat Jan  3 02:24:18 on ttty1
Welcome to Darwin!
Vigor10:~ draytek$ ping 192.168.1.1
PING 192.168.1.1 (192.168.1.1): 56 data bytes
64 bytes from 192.168.1.1: icmp_seq=0 ttl=255 time=0.755 ms
64 bytes from 192.168.1.1: icmp_seq=1 ttl=255 time=0.697 ms
64 bytes from 192.168.1.1: icmp_seq=2 ttl=255 time=0.716 ms
64 bytes from 192.168.1.1: icmp_seq=3 ttl=255 time=0.731 ms
64 bytes from 192.168.1.1: icmp_seq=4 ttl=255 time=0.72 ms
^C
--- 192.168.1.1 ping statistics ---
5 packets transmitted, 5 packets received, 0% packet loss
round-trip min/avg/max = 0.697/0.723/0.755 ms
Vigor10:~ draytek$ █

```

#### 4.4 Checking If the ISP Settings are OK or Not

Open **WAN>>Internet Access** page and then check whether the ISP settings are set correctly. Use the Connection Type drop down list to choose Static IP/DHCP/PPPoE/PPTP/L2TP for reviewing the settings that you configured previously.

- WAN**
- Internet Access
- Multi-VLAN
- Ports
- 3G Backup

##### WAN >> Internet Access

##### WAN IP Configuration

Enable	<input checked="" type="checkbox"/>	
Connection Type	DHCP	<input type="button" value="WAN IP Alias"/>

##### DHCP Settings

Router Name	Vigor2130	( The same as syslog's router name )
Domain Name		( Domain Name are required for some ISPs )
MTU Size		(Optional)

##### WAN Connection Detection

Mode	ARP
Ping IP	172.16.1.1

##### Clone MAC Address

Enable	<input type="checkbox"/>
--------	--------------------------

## 4.5 Backing to Factory Default Setting If Necessary

Sometimes, a wrong connection can be improved by returning to the default settings. Try to reset the router by software or hardware.



**Warning:** After pressing **factory default setting**, you will lose all settings you did before. Make sure you have recorded all useful settings before you pressing.

### Software Reset

You can reset the router to factory default via Web page.

Go to **System Maintenance** and choose **Reboot System** on the web page. The following screen will appear. Choose **Using factory default configuration** and click **OK**. After few seconds, the router will return all the settings to the factory settings.

**System Maintenance >> Reboot System**


**Reboot System**

**Do You want to reboot your router ?**

Using current configuration  
 Using factory default configuration

### Hardware Reset

While the router is running (ACT LED blinking), press the **Factory Reset** button and hold for more than 5 seconds. When you see the **ACT LED** blinks rapidly, please release the button. Then, the router will restart with the default configuration.

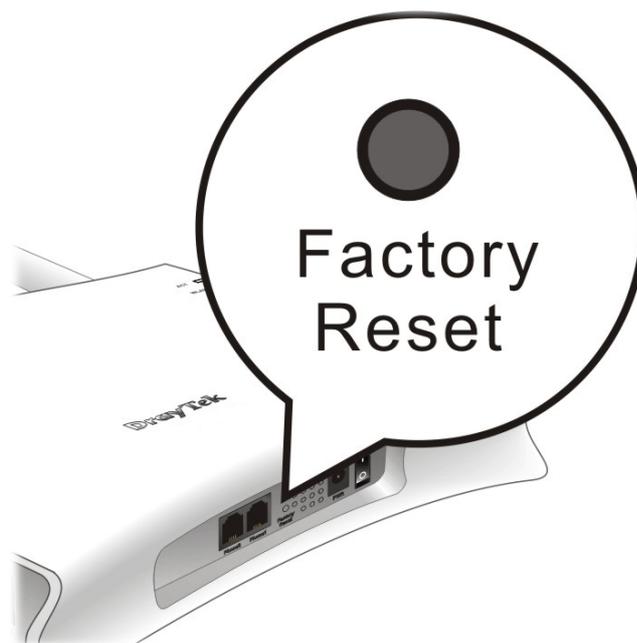

After restore the factory default setting, you can configure the settings for the router again to fit your personal request.

## 4.6 Contacting Your Dealer

If the router still cannot work correctly after trying many efforts, please contact your dealer for further help right away. For any questions, please feel free to send e-mail to [support@draytek.com](mailto:support@draytek.com).