

Vigor 2104快速安裝說明




DrayTek
WWW.DRAYTEK.COM.TW



無法顯示網頁

目前查閱的網頁無法使用。網站可能發生技術問題或者您需要調整瀏覽器設定。

請嘗試下列：

- 請按  [重新整理] 按鈕，或者稍後再試一次。
- 如果在網址列輸入網址，請確定未拼錯任何資料。
- 要檢查您的連線設定，請按 [工具] 功能表，然後按 [網際網路選項]。在 [連線] 標籤按 [區域網路設定]。設定應符合區域網路 (LAN) 系統管理員或網際網路服務提供者 (ISP) 提供的設定。
- 如果您的網路管理員已經啓用此功能，Microsoft Windows 將檢定並自動尋找網路連線設定。要 Windows 尋找設定，請按  [偵測網路設定]。
- 某些網站要求 128 位元連線安全性。按 [說明] 功能表中的 [關於 Internet Explorer] 來判定您安裝的安全性強度。
- 如果想連線到安全網站，請確定您的安全性設定可以支援。請按 [工具] 功能表，然後按 [網際網路選項]。在 [進階] 標籤，捲動到 [安全性] 區段，然後檢查 SSL 2.0、SSL 3.0、TLS 1.0、PCT 1.0 的設定。
- 按一下  [上一頁] 按鈕會嘗試其他連結。

找不到伺服器或 DNS 錯誤
Internet Explorer

硬體裝置完成之後，請打開瀏覽器。
例如：(IE或者Netscape) 然後在網址
列輸入：192.168.1.1 然後按下Enter鍵。
然後會跳出使用者帳號以及密碼的小視窗。
(如下)

連線到 192.168.1.1



Login to the Router Web Configurator

使用者名稱(U):  |

密碼(P):

☐ 記憶我的密碼(R)

首次登入無須密碼，請按確定鍵進入下一畫面。

DrayTek

Router Web Configurator

Setup Main Menu

DrayTek Corp.

- Model : Vigor2104
- Firmware Version : v2.3.6
- Build Date/Time : Tue Apr 8 15:33:35.30 2003
- LAN MAC Address : 00-50-7F-08-14-0A

Basic Setup (Setup First)

- >> Quick Start Wizard
- >> Administrator Password Setup
- >> LAN TCP/IP and DHCP Setup

Quick Setup

- >> Internet Access Setup

Advanced Setup

- >> Dynamic DNS Setup
- >> Call Schedule Setup
- >> NAT Setup
- >> Static Route Setup
- >> IP Filter/Firewall Setup
- >> UPNP Service Setup

System Management

- >> Online Status
- >> Configuration Backup / Restoration
- >> SysLog Setup
- >> Time Setup
- >> Management Setup
- >> Diagnostic Tools
- >> Reboot System
- >> Firmware Upgrade (TFTP Server)

Copyright (c) 2003, DrayTek Corp. All Rights Reserved.

快速設定請按此進入
(讓網路快速順利成功
連線)。

Internet Wizard - Microsoft Internet Explorer

Steps

- 1. Enter login password**
2. Select Time Zone
3. Connect to the Internet
4. Summary

Enter login password

There is no default password. For security, please choose a set of number or character (maximum 23 characters) as your **password** and enter it into the Password box.

New Password

1 使用者可以在此建立一組密碼來防止設定被竄改。
但設定密碼並非一定需要。

2 按下此按鈕進入下一畫面。

< Back **Next >** Finish Cancel

Internet Wizard - Microsoft Internet Explorer

Steps

1. Enter login password
- 2. Select Time Zone**
3. Connect to the Internet
4. Summary

Select Time Zone

Select the appropriate time zone for your location.

(GMT+08:00) Taipei

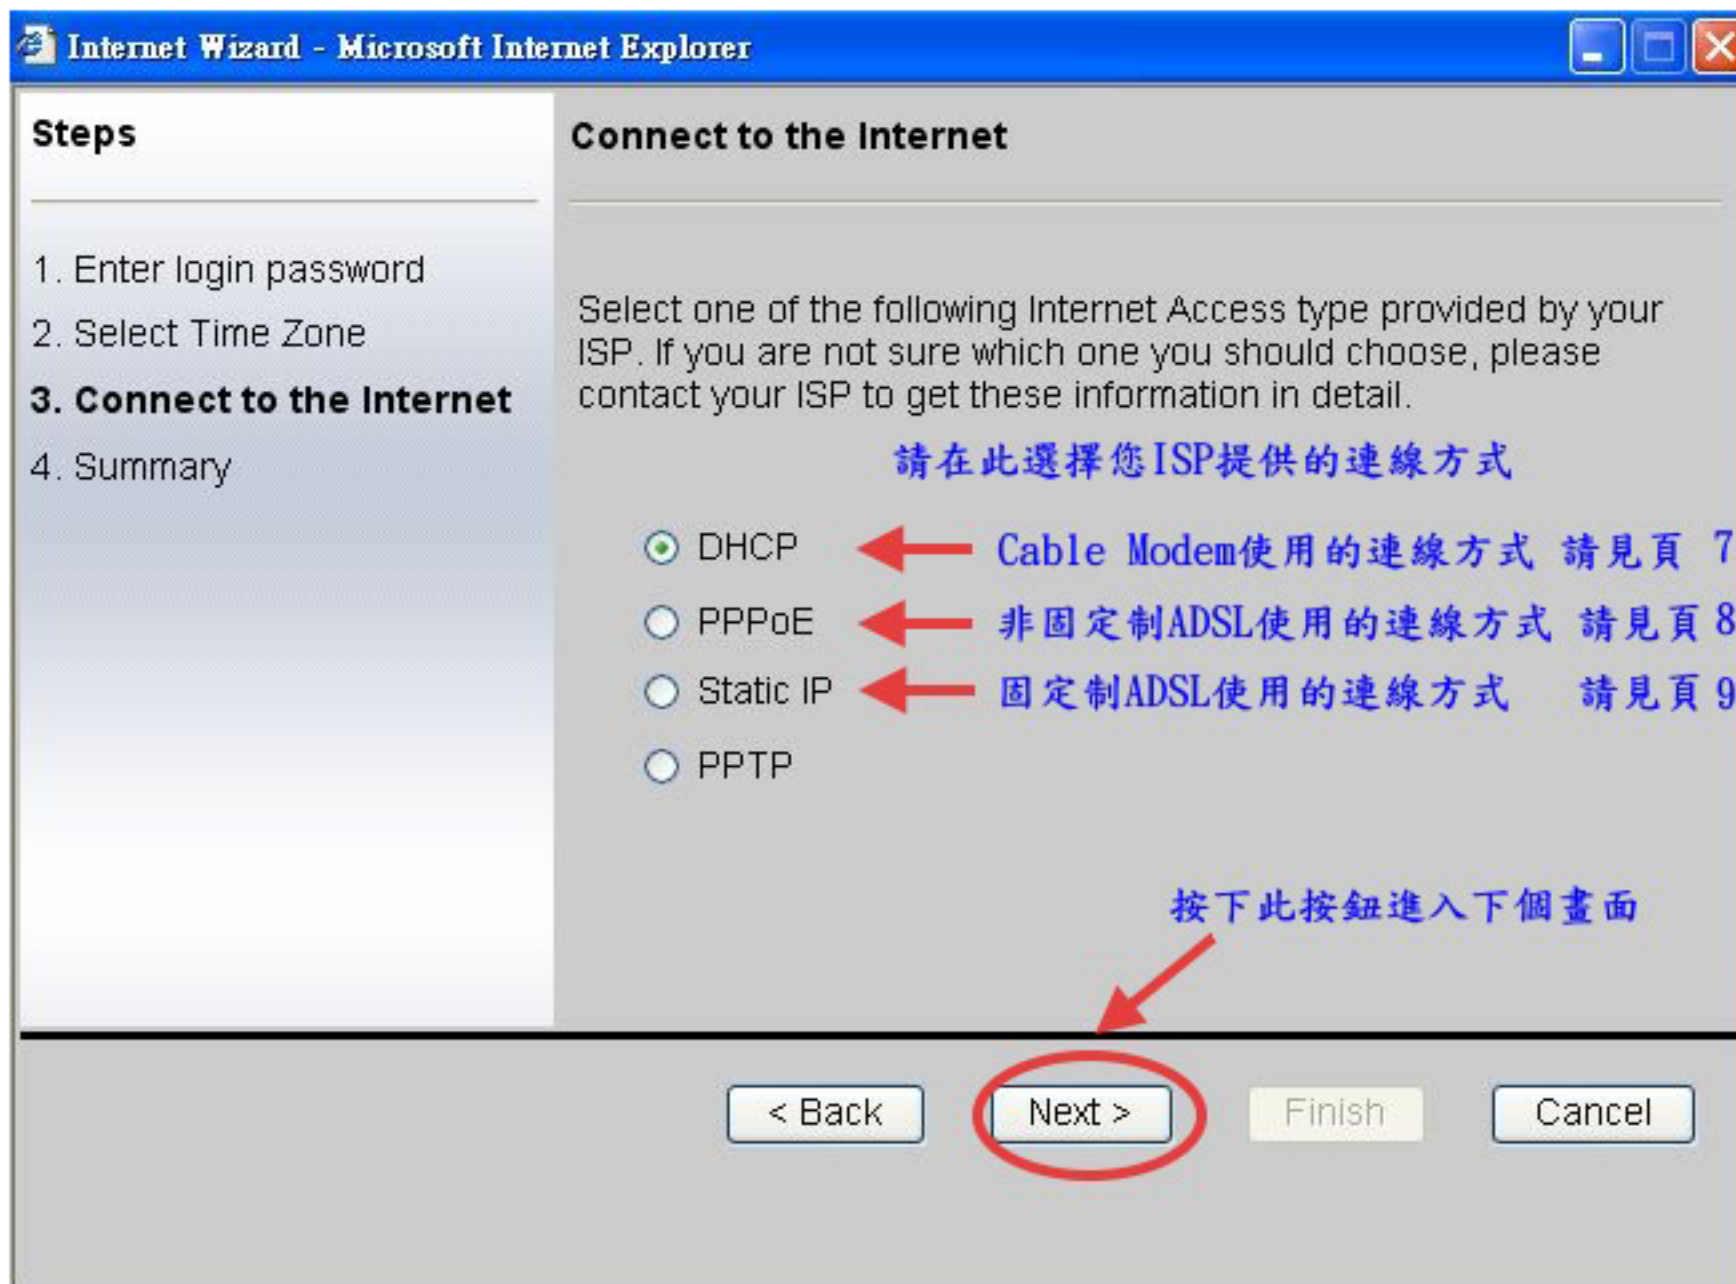
1

請在此選擇使用所在地時區

2

請按下此按鈕進入下一個畫面

< Back **Next >** Finish Cancel



Internet Wizard - Microsoft Internet Explorer

Steps

1. Enter login password
2. Select Time Zone
- 3. Connect to the Internet**
4. Summary

在此設定DHCP的設定值，有些ISP會要求輸入一個主要名字，可以在設定。也可不用輸入。

Connect to the Internet

If your ISP require you to enter a specific host name or specific MAC address, please enter it in. The **Clone MAC Address** button is used to copy the MAC address of your Ethernet adapter to the V2104P

Host Name (optional)

MAC 00 50 7F 08 14 0B (optional)

按此按鍵可以從Cable Modem上把Mac Address拷貝過來。

按這個鍵進入下個設定畫面

< Back **Next >** Finish Cancel

Internet Wizard - Microsoft Internet Explorer

Steps

1. Enter login password
2. Select Time Zone
- 3. Connect to the Internet**
4. Summary

Connect to the Internet

Enter the user name and password provided by your ISP.

User Name

Password

Connection Type

☒ Always On

☐ Dial On Demand

Idle Timeout

ISP提供之使用者ID

ISP提供之使用者密碼

保持持續連線

依需要撥號連線

按此按鈕進入下個畫面

< Back

Next >

Finish

Cancel

Internet Wizard - Microsoft Internet Explorer

Steps

1. Enter login password
2. Select Time Zone
- 3. Connect to the Internet**
4. Summary

Connect to the Internet

Enter the Static IP configuration provided by your ISP.

| | | | | |
|---------------|-----|-----|-----|------------|
| WAN IP | 172 | 16 | 3 | 39 |
| Subnet Mask | 255 | 255 | 255 | 0 |
| Gateway | 172 | 16 | 3 | 1 |
| Primary DNS | | | | |
| Secondary DNS | | | | (optional) |

ISP給定的固定IP (必填)

子網路遮罩 (必填)

通訊閘 (必填)

主要DNS (必填)

按此按漸進入下個畫面

< Back Next > Finish Cancel

