

## CHAPTER 7

# Dynamic DNS Setup


---

### 7.1 Introduction

Before you set up the Dynamic DNS (Domain Name Server) function, you have to subscribe free domain names from the Dynamic DNS service providers. The Vigor router provides up to three accounts for the function and supports the following providers: [www.dynsns.org](http://www.dynsns.org), [www.dynamic-nameserver.com](http://www.dynamic-nameserver.com), [www.no-ip.com](http://www.no-ip.com), [www.dtdns.com](http://www.dtdns.com), [www.changeip.com](http://www.changeip.com). You should visit their websites to register your own domain name for the router.

The Dynamic DNS function allows the router to update its online WAN IP address which assigned by ISP to the specified Dynamic DNS server. Once the router is online, you will be able to use the registered domain name to access the router or internal virtual servers from the Internet. Use the following setup link on the Setup Main Menu to configure the Dynamic DNS Setup function.

**Advanced Setup > Dynamic DNS Setup**

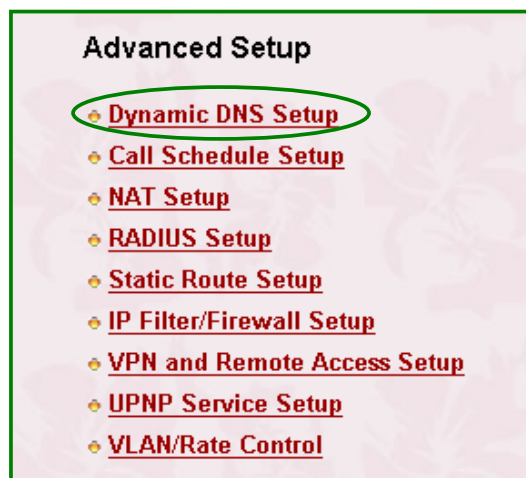

### 7.2 Configuration

## Dynamic DNS Setup

### Enable the Function and Add a Dynamic DNS Account

1. Assume you have a registered domain name from the DDNS provider, say *hostname.dyndns.org*, and an account with username: *test* and password: *test*.
2. Login **Web Configurator** --> **Dynamic DNS Setup** and then you will see the following web page.



> Advanced Setup > Dynamic DNS Setup

**Dynamic DNS Setup**

☐ Enable Dynamic DNS Setup View Log Force Update

Accounts

Index	Domain Name	Active
<u>1.</u>	---	X
<u>2.</u>	---	X
<u>3.</u>	---	X

Cancel Clear All OK

Copyright (c) 2004, DrayTek Corp. All Rights Reserved.

3. Check **Enable Dynamic DNS Setup** and Index number **1** to add an account for the router. And now, you will see the following web page.

## Dynamic DNS Setup

> Advanced Setup > Dynamic DNS Setup > Dynamic DNS Account Setup

Index : 1

☒ Enable Dynamic DNS Account

Service Provider: dyndns.org (www.dyndns.org) ▼

Service Type: Dynamic ▼

Domain Name: hostname . dyndns.org ▼

Login Name: test (max. 23 characters)

Password: ●●●● (max. 23 characters)

☐ Wildcards

☐ Backup MX

Mail Extender :

Cancel Clear All OK

Copyright (c) 2004, DrayTek Corp. All Rights Reserved.

4. Check **Enable Dynamic DNS Account**, and choose correct **Service Provider**: **dyndns.org**, type the registered hostname: **hostname** and domain name suffix: **dyndns.org** in the **Domain Name** block. The following two blocks should be typed your account **Login Name**: **test** and **Passowrd**: **test**.
5. Push **OK** button to activate the settings.

**Note:** The **Wildcard** and **Backup MX** features are not supported for all Dynamic DNS providers. You could get more detailed information from their websites.

### Disable the Function and Clear all Dynamic DNS Accounts

1. Login **Web Configurator** -> **Dynamic DNS Setup**.
2. Uncheck **Enable Dynamic DNS Setup**, and push **Clear All** button to disable the function and clear all accounts from the router.

Delete a Dynamic DNS Account

1. Login **Web Configurator** -> **Dynamic DNS Setup**.
2. Click the **Index** number you want to delete and then push **Clear All** button to delete the account.


## 7.3 Validation and Troubleshooting

### Ping the Registered Domain Name

1. After router is online, use **PING** utility to probe your registered domain name in order to verify if it works.
2. Login **Web Configurator** -> **Online Status** to make sure the responded IP address from the Dynamic DNS server should be the same as router's WAN IP address.

### View the DDNS Logs

1. Login **Web Configurator** -> **Dynamic DNS Setup**.
2. Push **View Log** button. The logs of DDNS updates will be shown as follows.

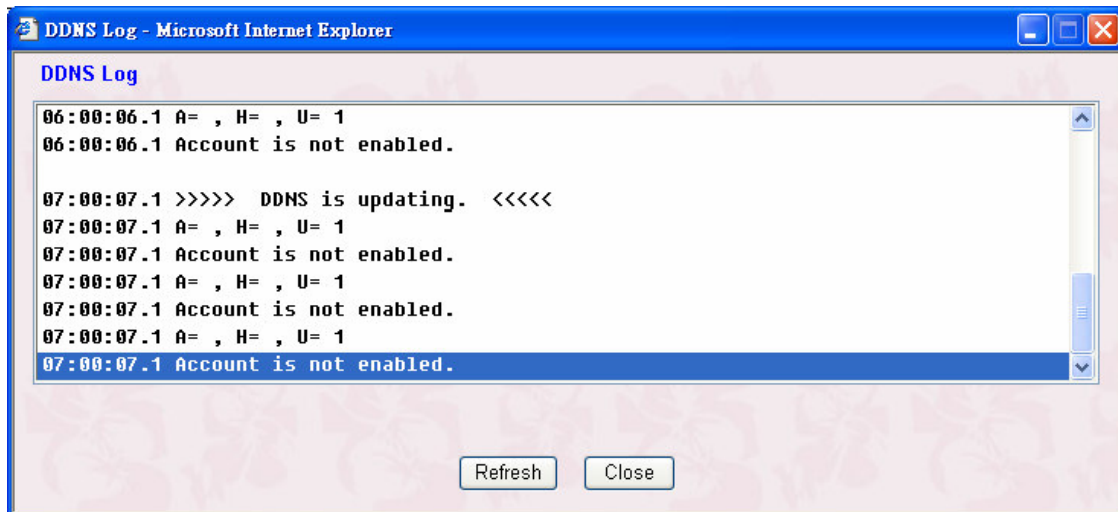

Where **A** : Login Name

**H** : Domain Name without suffix.

## Dynamic DNS Setup

---

**Return Code**= good 61.230.170.145

**Note:** If you have any DDNS update issues, the logs is useful to find where the problem is.

3. Click **Online Status** to know what the current WAN IP address is.

WAN Status		GW IP Addr 61.230.168.254				
Mode	IP Address	TX Packets	TX Rate	RX Packets	RX Rate	Up Time
PPPoE	61.230.170.145	221	10	218	3	0:13:13
>> Drop PPPoE or PPTP						

You will see the IP address in the circle, which is the same as the Return Code in the DDNS logs. This indicates that the update is successful.