



EMC Test report

Product Type : Network Camera

Applicant : VIVOTEK INC.

Address : 6F, No.192, Lien-Cheng Rd., Chung-Ho , New Taipei City, 235,
Taiwan, R.O.C.

Trade Name : VIVOTEK

Model Number : MD8562D

Test Specification : EN 50155: 2007
EN 50121-3-2: 2006

Issue Date : Sep. 22, 2011

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

| Rev. | Issue Date | Revisions | Revised By |
|-------------|-------------------|------------------|-------------------|
| 00 | Sep. 22, 2011 | Initial Issue | |
| | | | |
| | | | |
| | | | |



Verification of Compliance

Issued Date: 2011/09/22

Product Type : Network Camera
Applicant : VIVOTEK INC.
Address : 6F, No.192, Lien-Cheng Rd., Chung-Ho , New Taipei City, 235,
Taiwan, R.O.C.
Trade Name : VIVOTEK
Model Number : MD8562D
EUT Rated Voltage : DC 12V, 1.5A
Test Voltage : 230 Vac / 50 Hz
Applicable Standard : EN 50155: 2007
EN 50121-3-2: 2006
Test Result : Complied
Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment has been tested by A Test Lab Techno Corp., and found compliance with the requirements set forth in the Electromagnetic Compatibility Directive 96/48/EC and technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved By
(Manager)

: Miller Lee

Reviewed By

(Miller Lee)

(Testing Engineer)

: Gary Wu
(Gary Wu)



TABLE OF CONTENTS

| | | |
|----------|---|-----------|
| 1 | General Information..... | 5 |
| 1.1. | Summary of Test Result | 5 |
| 1.2. | Measurement Uncertainty | 6 |
| 2 | EUT Description | 7 |
| 3 | Test Methodology | 8 |
| 3.1. | Decision of Test Mode..... | 8 |
| 3.2. | EUT Exercise Software | 8 |
| 3.3. | Configuration of Test System Details | 9 |
| 4 | Electromagnetic Compatibility (EMC) Test..... | 10 |
| 4.1. | Conducted Emission Measurement..... | 10 |
| 4.2. | Radiated Interference Measurement | 14 |
| 4.3. | Electrostatic Discharge (ESD) Measurement | 19 |
| 4.4. | Transient Burst Susceptibility (EFT) Measurement | 25 |
| 4.5. | Radio- Frequency, Electromagnetic Field Immunity (RS) Measurement..... | 27 |
| 4.6. | Radio- Frequency, Conducted Disturbances Immunity (CS) Measurement..... | 30 |
| 5 | EUT Photograph..... | 33 |



1 General Information

1.1. Summary of Test Result

| Electromagnetic Compatibility (EMC) | | | | |
|-------------------------------------|------------------------------|--|--------|------------|
| EN 50155 Reference Clause(s) | Reference standard | Item | Result | Remark |
| 12.2.8.2 | EN 50121-3-2 EN 55011 | Power Line Conducted Emission Measurement | PASS | Applicable |
| 12.2.8.2 | EN 50121-3-2 EN 55011 | Radiated Emission Measurement | PASS | Applicable |
| 12.2.7.2 | EN 50121-3-2 EN 61000-4-2 | Electrostatic Discharge Test | PASS | Applicable |
| 12.2.7.3 | EN 50121-3-2 EN 61000-4-4 | Transient Burst Susceptibility Test | PASS | Applicable |
| 12.2.8.1 | EN 50121-3-2 EN 61000-4-3 | Radio- Frequency, Electromagnetic Field Immunity Test | PASS | Applicable |
| 12.2.8.1 | EN 50121-3-2 EN 61000-4-6 | Radio- Frequency, Conducted Disturbances Immunity Test | PASS | Applicable |

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Conducted Emission

The measurement uncertainty is evaluated as ± 2.26 dB.

Radiated Emission

The measurement uncertainty is evaluated as ± 3.19 dB.

Electrostatic Discharge

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in ESD testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant ESD standards. The immunity test signal from the ESD system meet the required specifications in IEC 61000-4-2 through the calibration report with the calibrated uncertainty for the waveform of voltage and timing as being 1.52 % and 2.69%.

Radiated susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in RS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant RS standards. The immunity test signal from the RS system meet the required specifications in IEC 61000-4-3 through the calibration for the uniform field strength and monitoring for the test level with the uncertainty evaluation report for the electrical field strength as being 2.65 dB.

Electrical fast transient/burst

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 1999[2], the requirements for measurement uncertainty in EFT/Burst testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant FT/Burst standards. The immunity test signal from the FT/Burst system meet the required specifications in IEC 61000-4-4 through the calibration report with the calibrated uncertainty for the waveform of voltage. Frequency and timing as being 1.57% and 2.73%.

Conducted susceptibility

As what is concluded in the document from Note2 of clause 5.4.6.2 of ISO/IEC 17025: 2005[E], the requirements for measurement uncertainty in CS testing are deemed to have been satisfied, and the testing is reported in accordance with the relevant CS standards. The immunity test signal from the CS system meet the required specifications in IEC 61000-4-6 through the calibration for unmodulated signal and monitoring for the test level with the uncertainty evaluation report for the injected modulated signal level through CDN and EM Clamp/Direct Injection as being 3.68 dB and 2.72 dB.



2 EUT Description

| | | |
|---------------|---|---|
| Product | : | Network Camera |
| Trade Name | : | VIVOTEK |
| Model Number | : | MD8562D |
| Applicant | : | VIVOTEK INC. 6F, No.192, Lien-Cheng Rd., Chung-Ho , New Taipei City, 235, Taiwan, R.O.C. |
| Manufacturer | : | VIVOTEK INC. 5F, No.168, Lien-Cheng Rd., Chung-Ho , New Taipei City, 235, Taiwan, R.O.C. |
| Component | | |
| Power Adapter | : | ENG_3A-183WP12 I/P: 100-240VAC, 50-60Hz, 0.6A O/P: 12VDC, 1.5A Shielded, 1.7m, Non-Detachable at Power Adaptor |

I/O Port Description :

| I/O PORT TYPES | Q'TY | Test Description |
|-------------------|------|-------------------------|
| 1). LAN Port | 1 | Connected to Notebook |
| 2). Audio in Port | 1 | Connected to Microphone |
| 3). Power Port | 1 | Connected to AC Adapter |



3 Test Methodology

3.1. Decision of Test Mode

3.1.1 The following test mode(s) were scanned during the preliminary test:

| |
|--------------------------|
| Pre-Test Mode |
| Mode 1: Normal Operation |

3.1.2 After the preliminary scan, the following test mode was found to produce the highest emission level.


| Final Test Mode | | |
|-------------------------------------|-------------------------------|--------|
| Electromagnetic Compatibility (EMC) | Power Line Conducted Emission | Mode 1 |
| | Radiated Emission | Mode 1 |
| | ESD | Mode 1 |
| | EFT | Mode 1 |
| | RS | Mode 1 |
| | CS | Mode 1 |

Then, the above highest emission mode of the configuration of the EUT and cable was chosen for all final test items.

3.2. EUT Exercise Software

1. Setup the EUT and simulators as shown on 3.3.
2. Turn on the power of all equipment.
3. The EUT will start to operate and display the video figure from the signal source.
4. The EUT will display “video figure” on monitor.
5. Repeat the above procedure (3) to (4).

3.3. Configuration of Test System Details

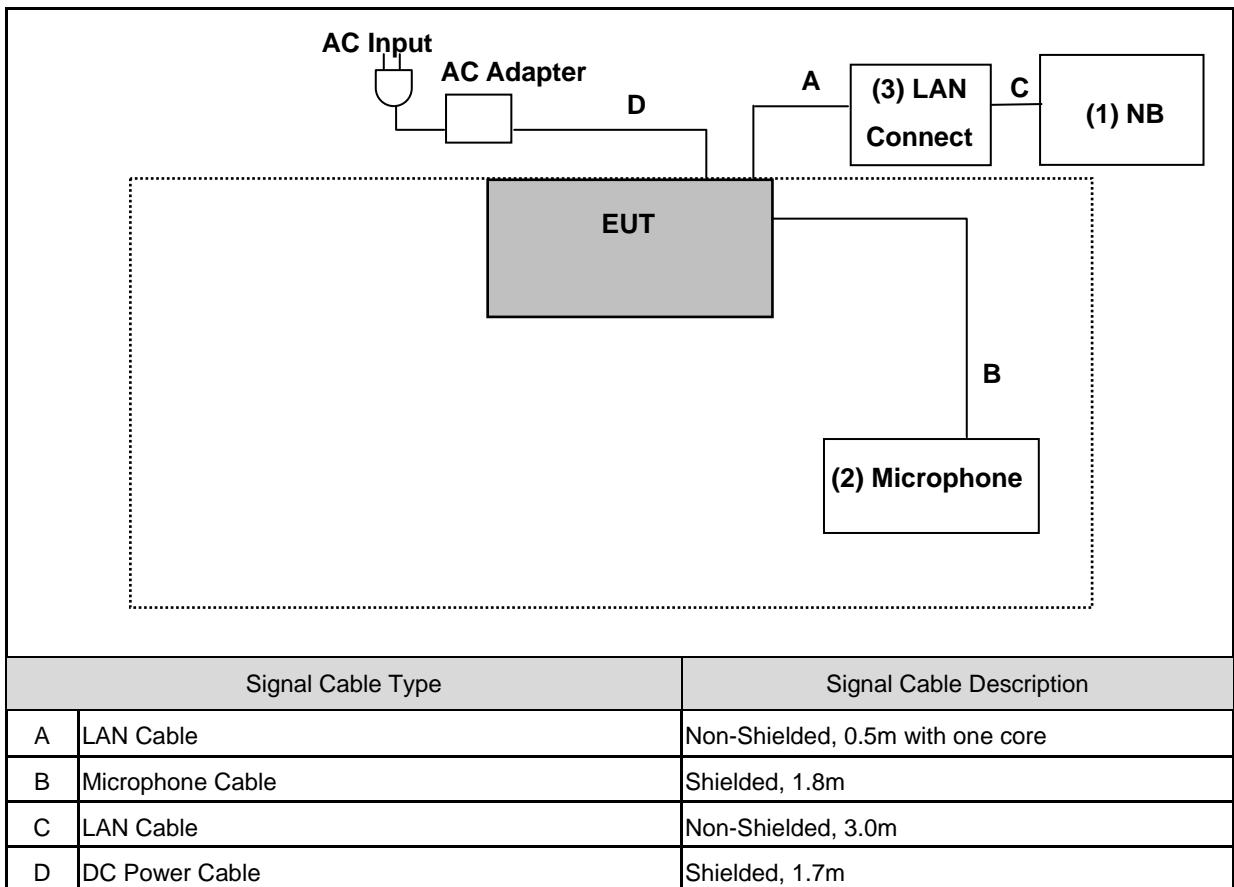

| Devices Description | | | | | |
|---------------------|-------------|--------------|--------------|--------------------------|--------------------|
| Product | | Manufacturer | Model Number | Serial Number | Power Cord |
| (1) | Notebook | DELL | D531 | CN-OXM006-48643-87A-3398 | Non-Shielded, 2.0m |
| (2) | Microphone | N/A | N/A | N/A | N/A |
| (3) | LAN Connect | N/A | N/A | N/A | N/A |

4 Electromagnetic Compatibility (EMC) Test

4.1. Conducted Emission Measurement

4.1.1. Limit

Reference to EN 50155 clause 12.2.8.2 and EN 50121-3-2 table 5

| Frequency (MHz) | Quasi-peak |
|--------------------|------------|
| 0.15 - 0.5 | 99 |
| 0.50 - 30.0 | 93 |

4.1.2. Test Instruments


| Describe | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|---------------|--------------|--------------|---------------|------------|--------|
| Test Receiver | R&S | ESCI | 100367 | 06/30/2011 | (1) |
| LISN | R&S | ENV216 | 101040 | 03/04/2011 | (1) |
| LISN | R&S | ENV216 | 101041 | 03/04/2011 | (1) |
| Test Site | ATL | TE02 | TE02 | N.C.R. | ----- |

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.1.3. Test Setup

A.C. Mains Setup

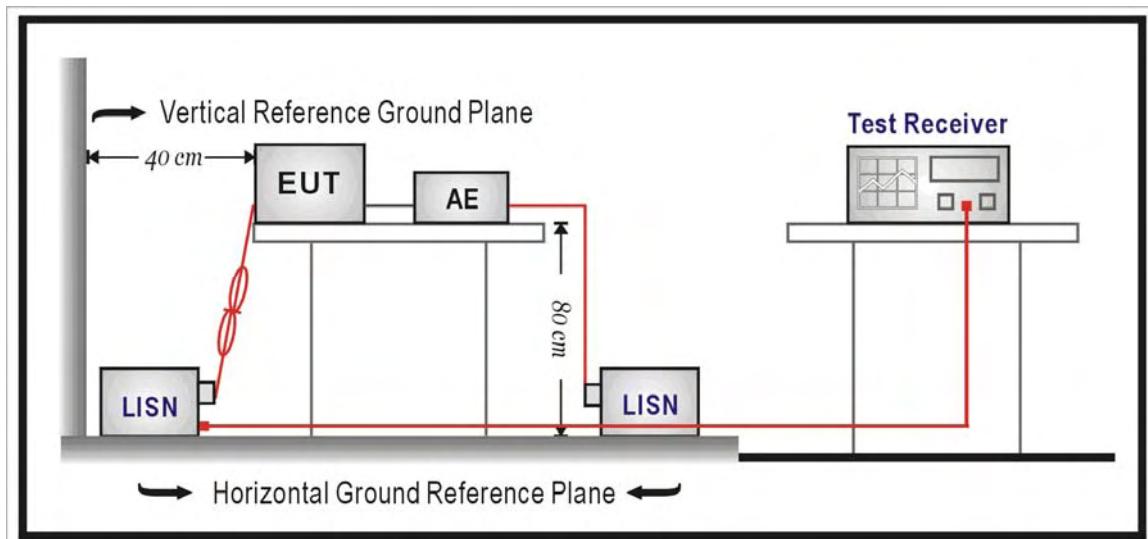


4.1.4. Test Procedure

Test Procedures were referred to EN 55011 sub-clause 7


4.1.5. Test Result

| | | | |
|--------------|--------------------|----------------------|--------------|
| Standard: | EN 50121-3-2 | Line: | L1 |
| Test item: | Conducted Emission | Power: | AC 230V/50Hz |
| Model: | MD8562D | Temp.(°C)/Hum.(%RH): | 25(°C)/55%RH |
| Mode: | Mode 1 | Date: | 2011/09/01 |
| Test By: | | | Gary Wu |
| Description: | | | |

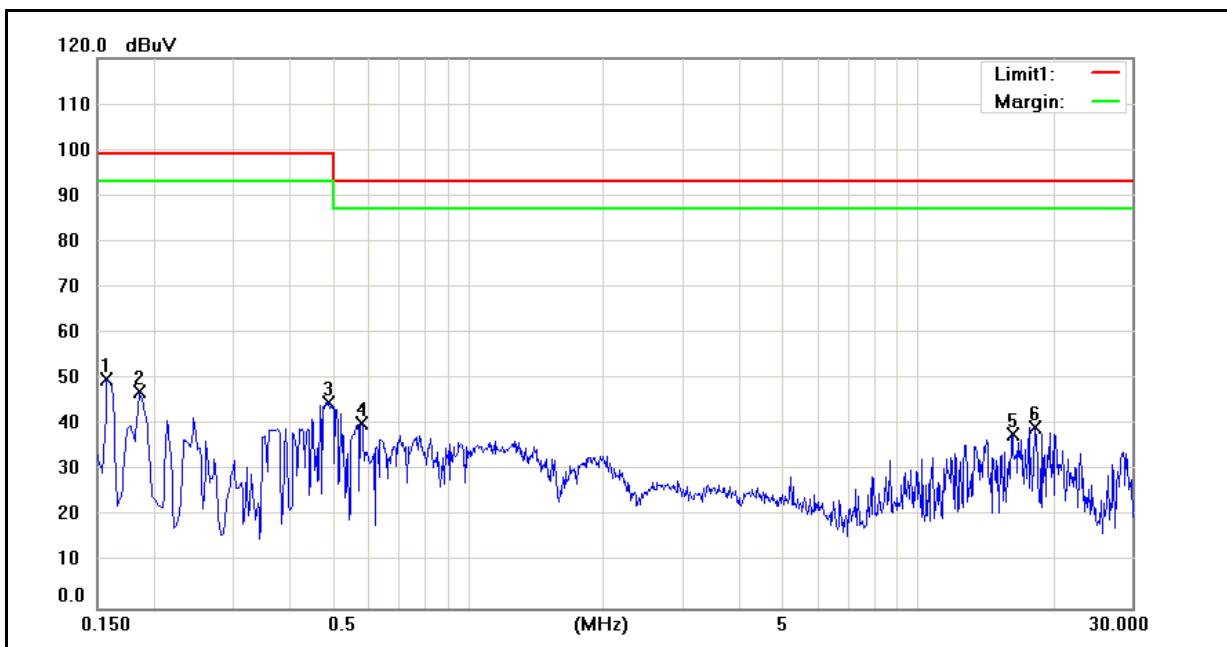

| No. | Frequency (MHz) | QP reading (dBuV) | Correction factor (dB) | QP result (dBuV) | QP limit (dBuV) | QP margin (dB) | Remark |
|-----|--------------------|-------------------------|------------------------------|------------------------|-----------------------|----------------------|--------|
| 1 | 0.1580 | 30.37 | 10.07 | 40.44 | 99.00 | -58.56 | Pass |
| 2 | 0.1860 | 33.35 | 10.06 | 43.41 | 99.00 | -55.59 | Pass |
| 3 | 0.4900 | 33.43 | 9.93 | 43.36 | 99.00 | -55.64 | Pass |
| 4 | 0.5820 | 28.15 | 9.90 | 38.05 | 93.00 | -54.95 | Pass |
| 5 | 16.2260 | 28.99 | 10.19 | 39.18 | 93.00 | -53.82 | Pass |
| 6 | 18.2420 | 29.44 | 10.35 | 39.79 | 93.00 | -53.21 | Pass |

| | | | |
|--------------|--------------------|----------------------|--------------|
| Standard: | EN 50121-3-2 | Line: | N |
| Test item: | Conducted Emission | Power: | AC 230V/50Hz |
| Model: | MD8562D | Temp.(°C)/Hum.(%RH): | 25(°C)/55%RH |
| Mode: | Mode 1 | Date: | 2011/09/01 |
| Test By: | | | Gary Wu |
| Description: | | | |

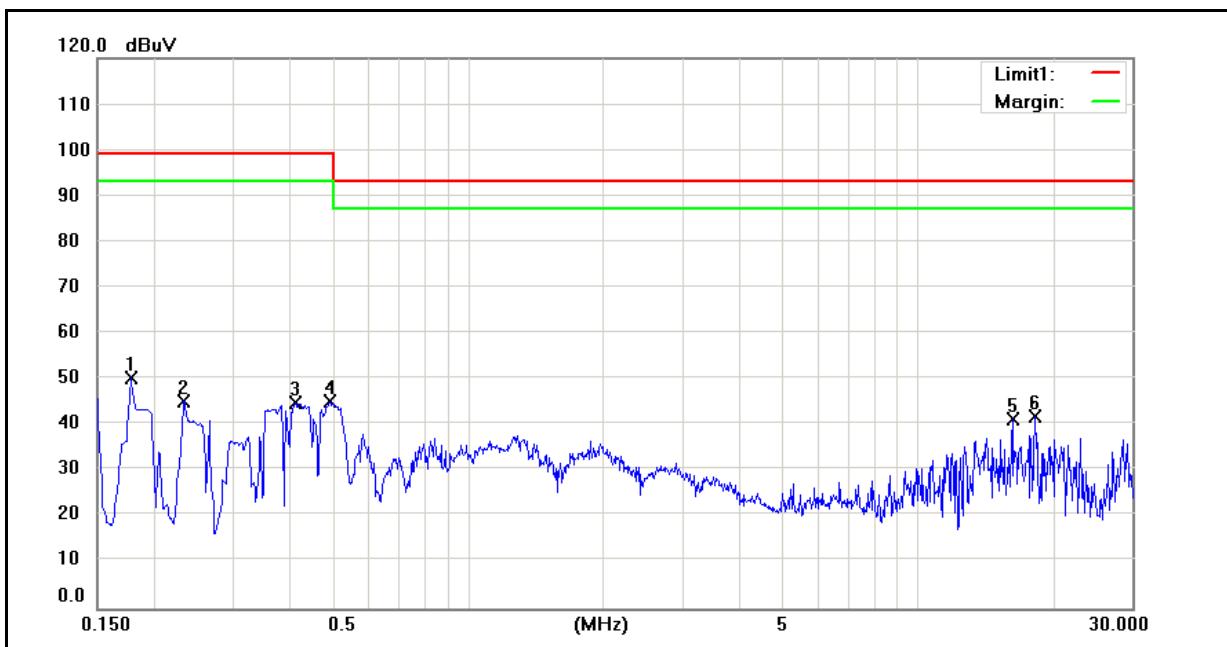

| No. | Frequency (MHz) | QP reading (dBuV) | Correction factor (dB) | QP result (dBuV) | QP limit (dBuV) | QP margin (dB) | Remark |
|-----|-----------------|-------------------|------------------------|------------------|-----------------|----------------|--------|
| 1 | 0.1780 | 35.02 | 10.14 | 45.16 | 99.00 | -53.84 | Pass |
| 2 | 0.2340 | 30.27 | 10.12 | 40.39 | 99.00 | -58.61 | Pass |
| 3 | 0.4140 | 33.68 | 10.05 | 43.73 | 99.00 | -55.27 | Pass |
| 4 | 0.4940 | 33.64 | 10.01 | 43.65 | 99.00 | -55.35 | Pass |
| 5 | 16.2300 | 28.32 | 10.24 | 38.56 | 93.00 | -54.44 | Pass |
| 6 | 18.2420 | 29.48 | 10.39 | 39.87 | 93.00 | -53.13 | Pass |

4.1.6. Test Photograph

A.C. Mains:


Test Mode : Mode 1

Description : Front View of Conducted Test



Test Mode : Mode 1

Description : Back View of Conducted Test

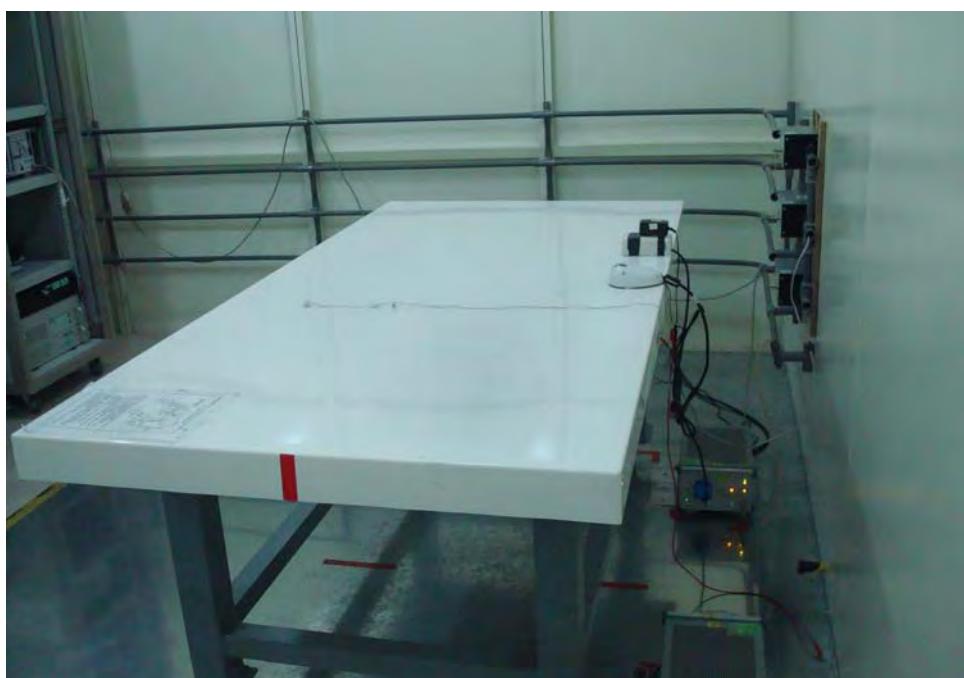



4.2. Radiated Interference Measurement

4.2.1. Limit

Reference to EN 50155 clause 12.2.8.2 and EN 50121-3-2 table 6

| Frequency (MHz) | Quasi-peak |
|--------------------|------------|
| 30 - 230 | 40.0 |
| 230 - 1000 | 47.0 |

4.2.2. Test Instruments


| 10 Meter Chamber | | | | | |
|----------------------------|--------------------------------|--------------|---------------|------------|--------|
| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
| Pre Amplifier | Agilent | 8447D | 2944A11120 | 01/11/2011 | (1) |
| Pre Amplifier | Agilent | 8447D | 2944A11119 | 01/11/2011 | (1) |
| Test Receiver | R&S | ESCI | 100722 | 10/14/2010 | (1) |
| Test Receiver | R&S | ESCI | 101000 | 12/15/2010 | (1) |
| Broadband Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB 9160 | 9160-3268 | 07/01/2011 | (1) |
| Broadband Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB 9160 | 9160-3273 | 12/30/2010 | (1) |
| Horn Antenna (1~18GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA9120D | 9120D-550 | 06/29/2011 | (1) |
| Horn Antenna (18~40GHz) | SCHWARZBECK MESS-ELEKTRONIK | BBHA9170 | 9170-320 | 06/28/2011 | (1) |
| Test Site | ATL | TE06 | TE06 | 09/04/2011 | (1) |

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.2.3. Setup

Below 1GHz

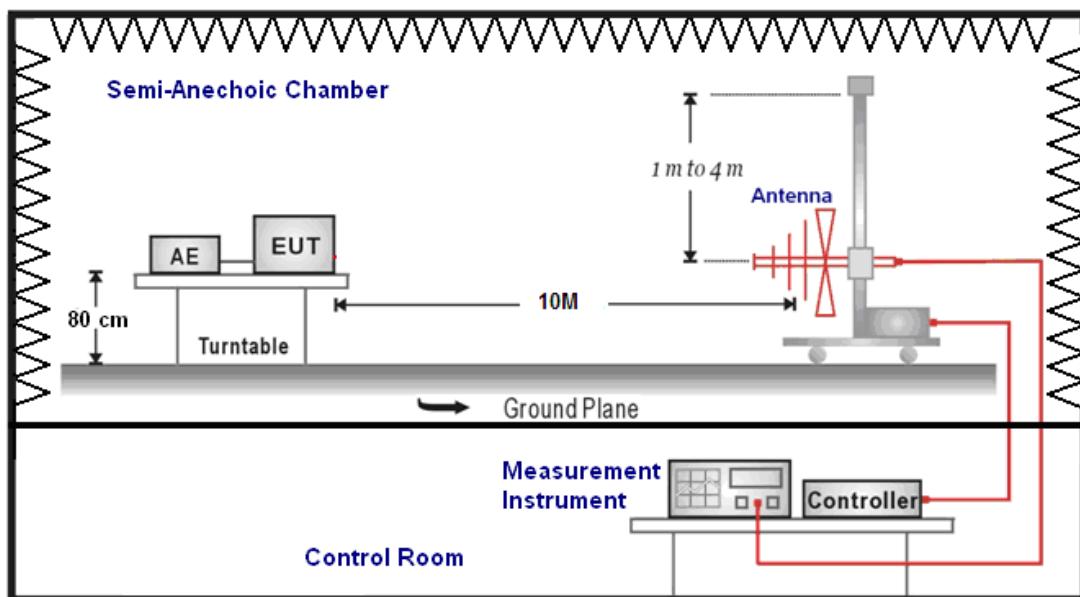


4.2.4. Test Procedure

Test Procedures were referred to EN 55011 sub-clause 7


4.2.5. Test Result

| | | | |
|-------------|-------------------|----------------------|--------------|
| Standard: | EN 50121-3-2 | Test Distance: | 10m |
| Test item: | Radiated Emission | Power: | AC 230V/50Hz |
| Model: | MD8562D | Temp.(°C)/Hum.(%RH): | 20(°C)/40%RH |
| Mode: | Mode 1 | Date: | 2011/09/13 |
| Ant.Polar.: | Horizontal | Test By: | Gary Wu |

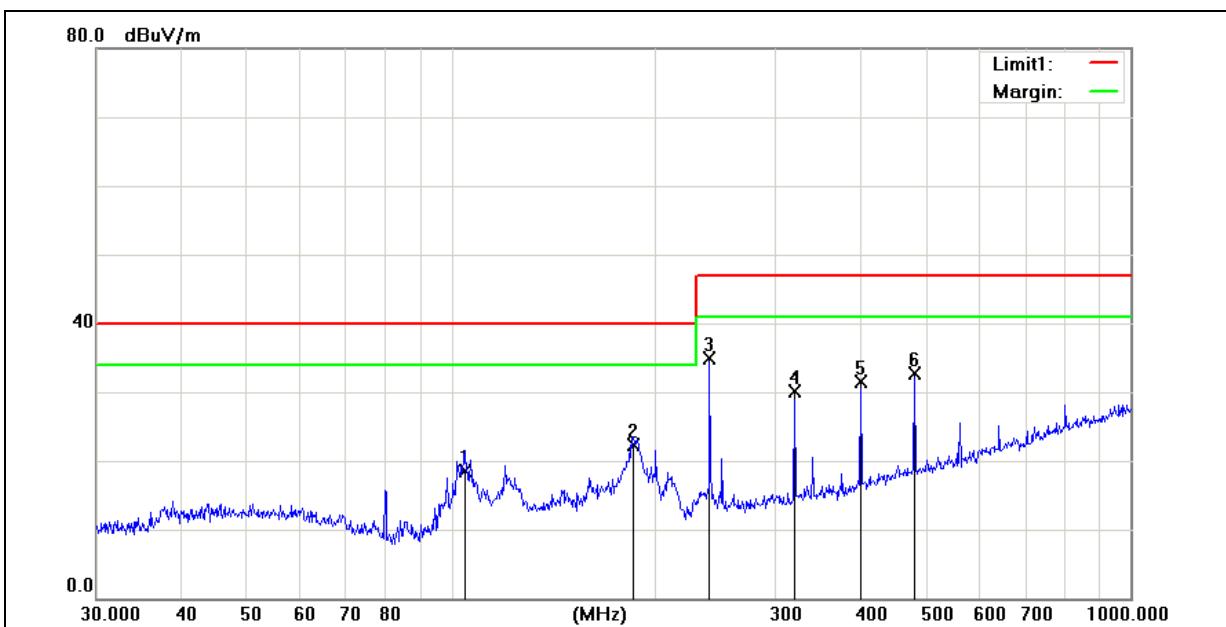

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (°) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|------------|--------|
| 1 | 104.5361 | 34.69 | -16.09 | 18.60 | 40.00 | -21.40 | 400 | 315 | QP |
| 2 | 185.1380 | 36.60 | -14.30 | 22.30 | 40.00 | -17.70 | 400 | 282 | QP |
| 3 | 239.9873 | 48.09 | -13.19 | 34.90 | 47.00 | -12.10 | 400 | 71 | QP |
| 4 | 319.9370 | 40.79 | -10.69 | 30.10 | 47.00 | -16.90 | 300 | 62 | QP |
| 5 | 400.4320 | 40.60 | -9.00 | 31.60 | 47.00 | -15.40 | 300 | 245 | QP |
| 6 | 480.5276 | 40.13 | -7.33 | 32.80 | 47.00 | -14.20 | 300 | 148 | QP |

| | | | |
|-------------|-------------------|----------------------|--------------|
| Standard: | EN 50121-3-2 | Test Distance: | 10m |
| Test item: | Radiated Emission | Power: | AC 230V/50Hz |
| Model: | MD8562D | Temp.(°C)/Hum.(%RH): | 20(°C)/40%RH |
| Mode: | Mode 1 | Date: | 2011/09/13 |
| Ant.Polar.: | Vertical | Test By: | Gary Wu |

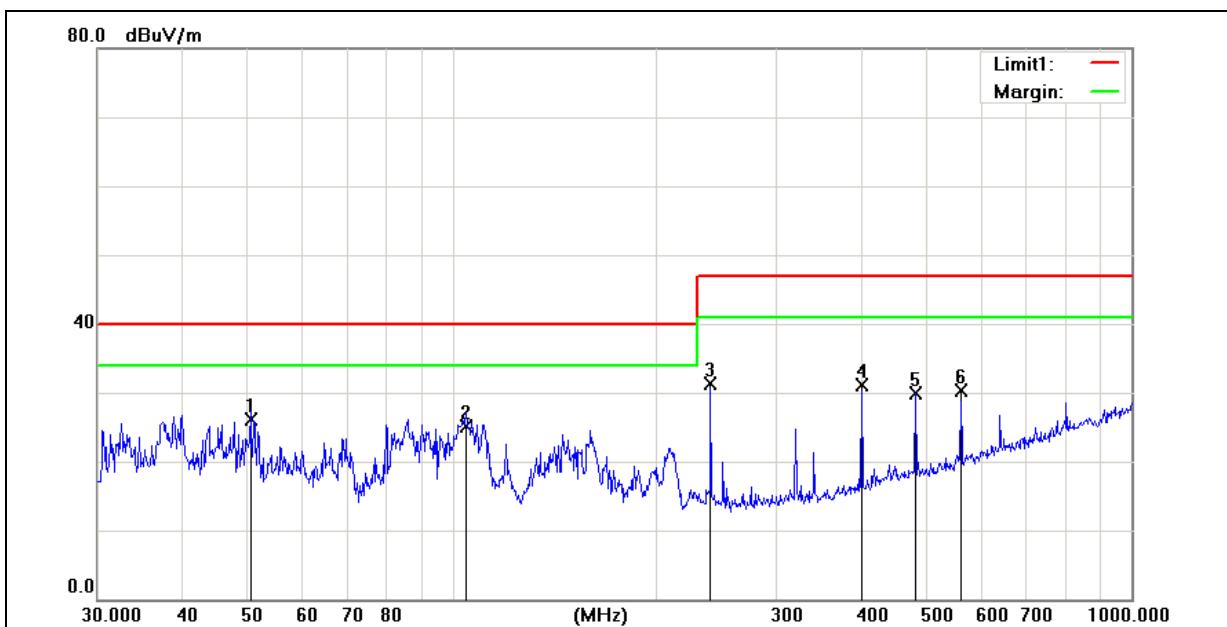

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor(dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Height (cm) | Degree (°) | Remark |
|-----|-----------------|----------------|----------------------|-----------------|----------------|-------------|-------------|------------|--------|
| 1 | 50.4090 | 40.38 | -14.28 | 26.10 | 40.00 | -13.90 | 200 | 77 | QP |
| 2 | 104.9033 | 41.23 | -16.03 | 25.20 | 40.00 | -14.80 | 100 | 65 | QP |
| 3 | 239.9873 | 44.49 | -13.19 | 31.30 | 47.00 | -15.70 | 100 | 254 | QP |
| 4 | 400.4318 | 40.20 | -9.00 | 31.20 | 47.00 | -15.80 | 100 | 0 | QP |
| 5 | 480.5276 | 37.22 | -7.33 | 29.89 | 47.00 | -17.11 | 100 | 77 | QP |
| 6 | 560.6928 | 36.36 | -6.06 | 30.30 | 47.00 | -16.70 | 100 | 196 | QP |

4.2.6. Test Photograph


Test Mode : Mode 1

Description : Front View of Radiated Emission Test_Below 1GHz



Test Mode : Mode 1

Description : Back View of Radiated Emission Test_Below 1GHz

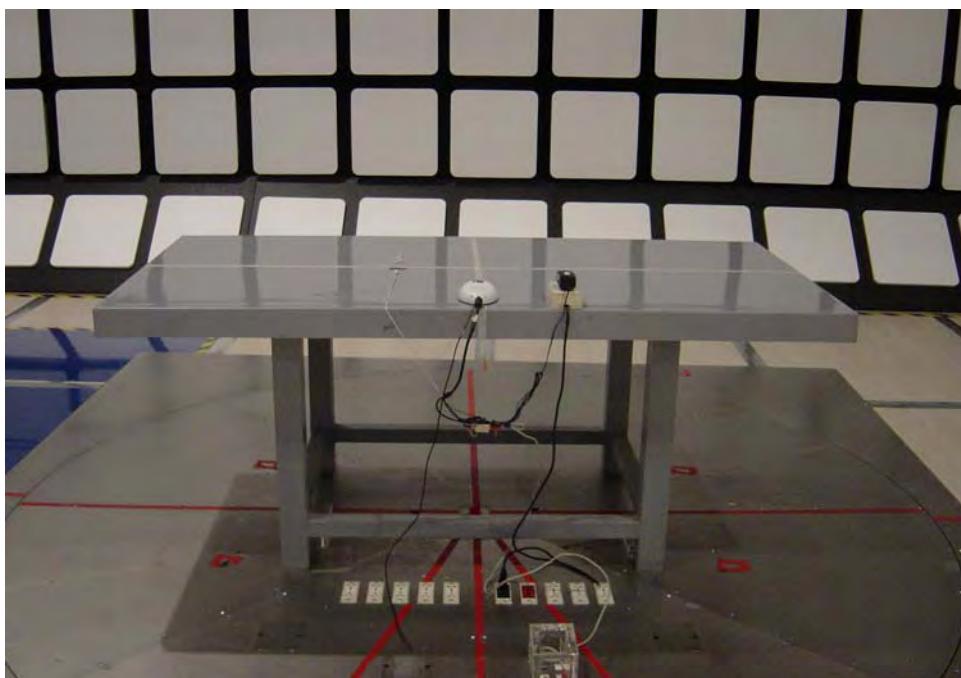

4.3. Electrostatic Discharge (ESD) Measurement

4.3.1. Test Specification

Reference to EN 50155 clause 12.2.7.2 and EN 50121-3-2 table 9

| Test Specification | Performance Criterion |
|-------------------------------|-----------------------|
| Air Discharge: ± 8 kV | B |
| Contact Discharge: ± 6 kV | |


4.3.2. Test Instrument

| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|--------------------------|--------------|--------------|------------------|------------|--------|
| Discharge Gun | Noiseken | ESS-2002 | NOISE-ESS-2002CM | 03/15/2011 | (1) |
| 0.8m Height Wooden Table | N/A | N/A | N/A | N.C.R. | ----- |
| Test Site | ATL | TE04 | TE04 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.3.3. Setup

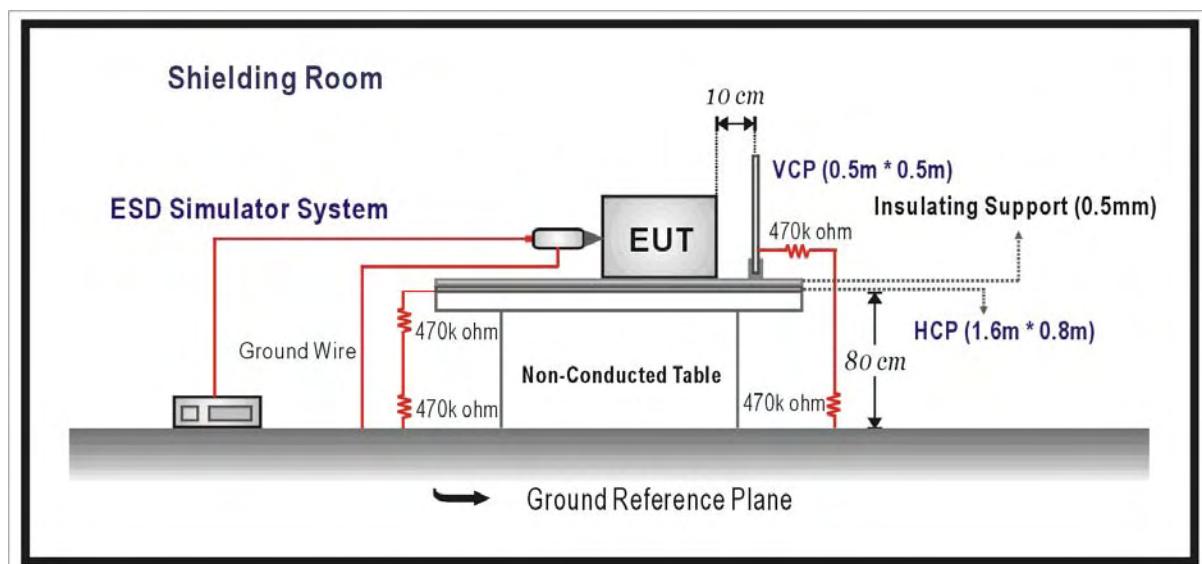

4.3.4. Test Procedure

Test Procedures were referred to EN 61000-4-2 sub-clause 8



4.3.5. Test Result

| | | | | | | | | |
|--------------|-------------------------|--|--|--|-----------|------|--|--|
| Product | Network Camera | | | | | | | |
| Test Item | Electrostatic Discharge | | | | | | | |
| Test Mode | Mode 1 | | | | | | | |
| Date of Test | 09/19/2011 | | | | Test Site | TE04 | | |

| Air Discharge | | | | | | | | | | |
|---------------|-------------------------------------|---------------------------------------|----------------------------|-------------------------------------|---------------------------------------|----------------------------|-------------------------------------|---------------------------------------|----------------------------|-------------------------------------|
| Test Points | Test Levels | | | | | | Results | | | |
| | ± 2 kV | Performance Criterion | ± 4 kV | Performance Criterion | ± 8 kV | Performance Criterion | Pass | Fail | Observation | |
| Front | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> |
| Back | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> |
| Left | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> |
| Right | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> |
| Top | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> |
| Bottom | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> |

| Contact Discharge | | | | | | | | | | |
|-------------------|-------------------------------------|---------------------------------------|----------------------------|-------------------------------------|---------------------------------------|----------------------------|-------------------------------------|---------------------------------------|----------------------------|-------------------------------------|
| Test Points | Test Levels | | | | | | Results | | | |
| | ± 2 kV | Performance Criterion | ± 4 kV | Performance Criterion | ± 6 kV | Performance Criterion | Pass | Fail | Observation | |
| Front | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> |
| Back | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> |
| Left | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> |
| Right | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> |
| Top | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> | <input type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> |
| Bottom | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input checked="" type="checkbox"/> |

For the tested points to EUT, please refer to attached page. (Blue arrow mark for Air Discharge and red arrow mark for Contact Discharge)

| Discharge To Horizontal Coupling Plane | | | | | | | | | | |
|--|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|-------------------------------------|--------------------------|---------------------------------------|----------------------------|---------|--|
| Side of EUT | Test Levels | | | | Results | | | | | |
| | ± 2 kV | ± 4 kV | ± 6 kV | ± 8 kV | Pass | Fail | Performance Criterion | Observation | | |
| Front | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | --- | |
| Back | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | --- | |
| Left | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | --- | |
| Right | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | --- | |

| Discharge To Vertical Coupling Plane | | | | | | | | | | |
|--------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|--------------------------|-------------------------------------|--------------------------|---------------------------------------|----------------------------|---------|--|
| Side of EUT | Test Levels | | | | Results | | | | | |
| | ± 2 kV | ± 4 kV | ± 6 kV | ± 8 kV | Pass | Fail | Performance Criterion | Observation | | |
| Front | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | --- | |
| Back | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | --- | |
| Left | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | --- | |
| Right | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | --- | |

Note : There was no change compared with initial operation during the test.

4.3.6. Test Photograph

Test Mode : Mode 1

Description : Front View of ESD Test



Test Mode : Mode 1

Description : Close View of ESD Test



Test Mode : Mode 1

Description : Close View of ESD Test



Test Mode : Mode 1

Description : Close View of ESD Test



Test Mode : Mode 1

Description : Close View of ESD Test



Test Mode : Mode 1

Description : Close View of ESD Test



Test Mode : Mode 1

Description : Close View of ESD Test



4.4. Transient Burst Susceptibility (EFT) Measurement

4.4.1. Test Specification

Reference to EN 50155 clause 12.2.7.3 and EN 50121-3-2 table 7 & 8 5 kHz Repetition frequency

| Test Specification | Performance Criterion |
|----------------------------|-----------------------|
| AC power ports: ± 2 kV | A |
| DC power ports: ± 2 kV | |
| Signal ports: ± 2 kV | |


4.4.2. Test Instrument

| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|---------------------|----------------|-------------------|---------------|------------|--------|
| EMC Immunity Tester | EMC-PARTNER AG | TRANSIENT 2000IN6 | 952 | 02/08/2011 | (1) |
| Test Site | ATL | TE08 | TE08 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.4.3. Setup

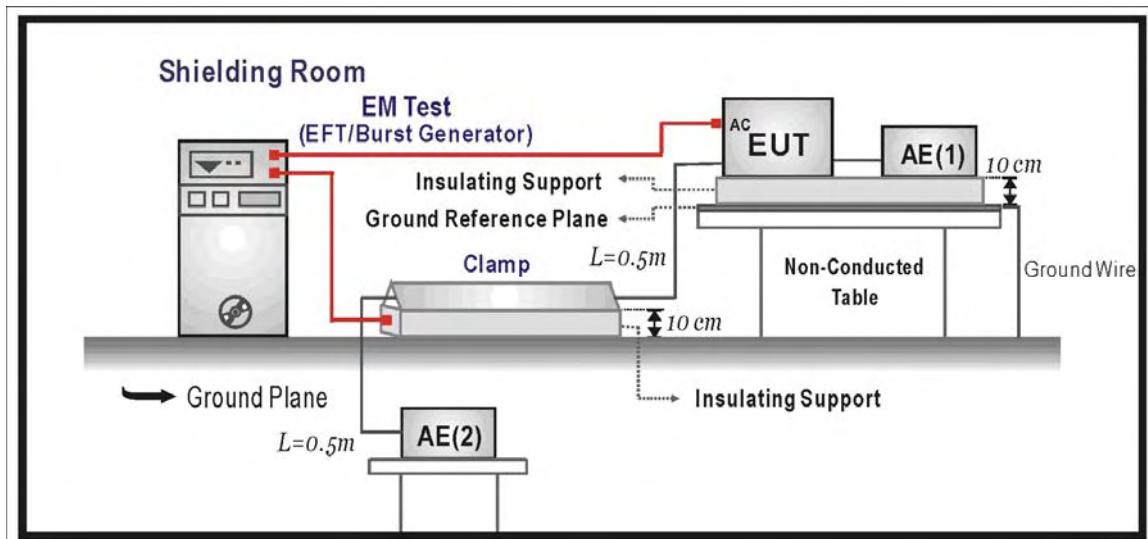

4.4.4. Test Procedure

Test Procedures were referred to EN 61000-4-4 sub-clause 8

4.4.5. Test Result

| Product | Network Camera | | | |
|--------------|--------------------------------------|---------------------------------------|----------------------------|----------------------------|
| Test Item | Transient Burst Susceptibility (EFT) | | | |
| Test Mode | Mode 1 | | | |
| Date of Test | 09/19/2011 | | Test Site | TE08 |
| Test Point | Test Level (kV) | Performance Criterion | | Result |
| L | ± 2 | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> C |
| N | ± 2 | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> C |
| L+N | ± 2 | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> C |
| LAN Port | ± 2 | <input checked="" type="checkbox"/> A | <input type="checkbox"/> B | <input type="checkbox"/> C |

Note: "A": The apparatus shall continue to operate as intended during and after the test, no degradation of performance or loss of function.

4.4.6. Test Photograph

Test Mode : Mode 1

Description : Front View of EFT Test – AC power, LAN Port





4.5. Radio- Frequency, Electromagnetic Field Immunity (RS) Measurement

4.5.1. Test Specification

Reference to EN 50155 clause 12.2.8.1 and EN 50121-3-2 table 9

| Test Specification | Performance Criterion |
|--|-----------------------|
| The frequency steps: 1%, Log sweep, Dwell time: 3.0 sec. | |
| Frequency range: 80 to 1000 MHz, Field strength: 20 V/m, 80% AM (1kHz) (Note: For equipment mounted in network communication center a severity level of 10V/m may be used.) | |
| Frequency range: 1400 to 2100 MHz, Field strength: 10 V/m, 80% AM (1kHz) | A |
| Frequency range: 2100 to 2500 MHz, Field strength: 5 V/m, 80% AM (1kHz) | |


4.5.2. Test Instrument

| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|-----------------------------|-----------------------------|-----------------------|----------------|------------|--------|
| SMB 100A SIGNAL GENERATOR | R&S | SMB100A | 100724 | 02/23/2011 | (1) |
| NRP-Z91 POWER SENSOR | R&S | NRP-Z91 | 100611 | 07/06/2011 | (1) |
| NRP-Z91 POWER SENSOR | R&S | NRP-Z91 | 100612 | 07/07/2011 | (1) |
| NRP POWER METER | R&S | NRP | 101591 | 07/07/2011 | (1) |
| Log-periodic Antenna | R&S | HL046 | 100046 | N.C.R. | ----- |
| Solid State Power Amplifier | BONN ELEKTRONIK | BLWA 0830-160/100/40D | 87050 | N.C.R. | ----- |
| Broad-Band Horn Antenna | Schwarzbeck Mess-Elektronik | BBHA 9120 | BBHA 9120 E388 | N.C.R. | ----- |
| Test Site | ATL | TE07 | 888009 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.5.3. Setup

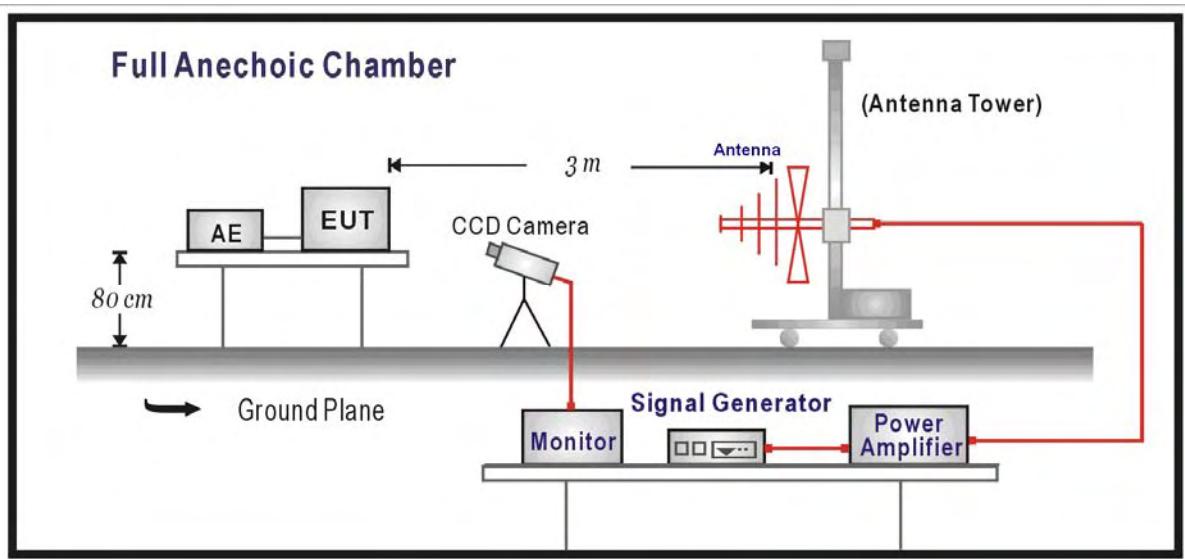

4.5.4. Test Procedure

Test Procedures were referred to EN 61000-4-3 sub-clause 8

4.5.5. Test Result


| Product | Network Camera | | | | |
|--------------------|-------------------------|-------------------------|------------------|---|--------|
| Test Item | Radiated Susceptibility | | | | |
| Test Mode | Mode 1 | | | | |
| Position | 0°, 90°, 180°, 270° | | | | |
| Date of Test | 09/19/2011 | | | Test Site | TE07 |
| Frequency (MHz) | Polarity | Field Strength (V/m) | AM (1kHz) (%) | Performance Criterion | Result |
| 80 ~ 1000 | H | 20 | 80 | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C | PASS |
| 80 ~ 1000 | V | 20 | 80 | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C | PASS |
| 1400 ~ 2100 | H | 10 | 80 | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C | PASS |
| 1400 ~ 2100 | V | 10 | 80 | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C | PASS |
| 2100 ~ 2500 | H | 5 | 80 | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C | PASS |
| 2100 ~ 2500 | V | 5 | 80 | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C | PASS |

Note: "A": The apparatus shall continue to operate as intended during and after the test, no degradation of performance or loss of function.

4.5.6. Test Photograph

Test Mode : Mode 1

Description : Front View of RS Test

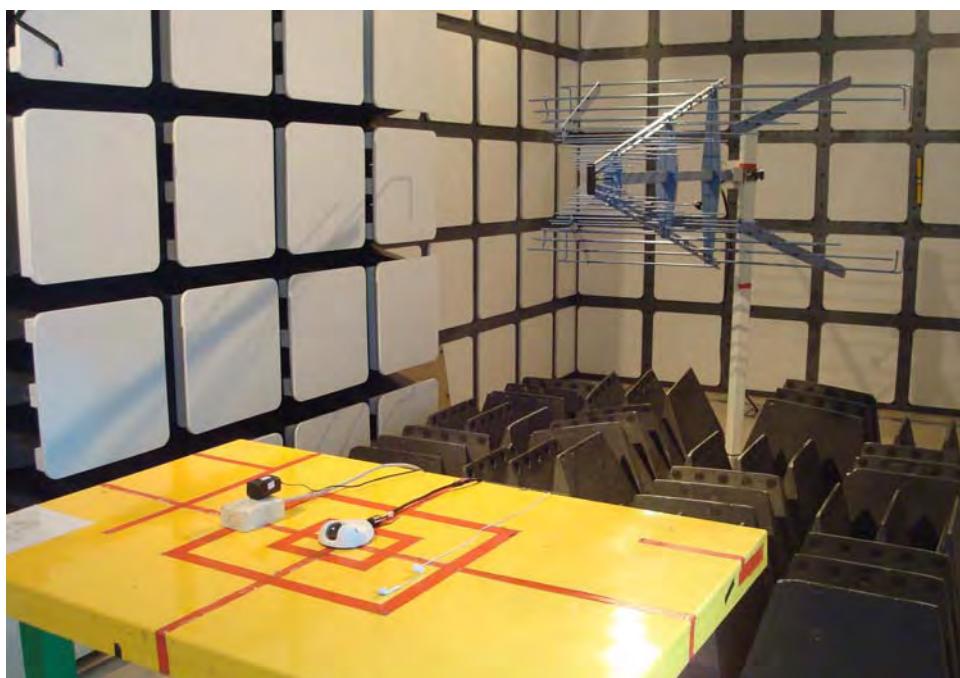



4.6. Radio- Frequency, Conducted Disturbances Immunity (CS) Measurement

4.6.1. Test Specification

Reference to EN 50155 clause 12.2.8.1 and EN 50121-3-2 table 7 & 8

| Test Specification | Performance Criterion |
|--|-----------------------|
| Frequency range: 0.15 to 80 MHz, Field strength: 10 V, 80% AM (1kHz) | |
| Input AC power ports | A |
| Input DC power ports | |
| Signal ports | |

4.6.2. Test Instrument


| Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Remark |
|---|--------------|---------------------------|---------------|------------|--------|
| Signal Line Coupling Decoupling Network | FCC | FCC-801--T2-RJ11 | 8017 | 07/07/2011 | (1) |
| Signal Line Coupling Decoupling Network | FCC | FCC-801--T4-RJ45 | 8018 | 07/07/2011 | (1) |
| Signal Line Coupling Decoupling Network | FCC | FCC-801-M2/M3-16A 8030 | 8030 | 07/07/2011 | (1) |
| EM Injection Clamp | FCC | F-203I-23MM | 8576 | 07/07/2011 | (1) |
| Amplifiers | ar | 75A250A | 328729 | 07/07/2011 | (1) |
| Dual Directional Coupler | ar | DC2600M2 | 329049 | 07/07/2011 | (1) |
| IMS INTEGR. MEAS.SYSTEM F.EMS | R&S | IMS | 100019 | 07/07/2011 | (1) |
| NRP-Z91 POWER SENSOR | R&S | NRP-Z91 | 100613 | 07/07/2011 | (1) |
| Signal Generator Module | R&S | SM300 Module | 102209 | N.C.R. | ----- |
| De-coupling Network | FCC | F-203I-23MM- DCN | 8234 | N.C.R. | ----- |
| Test Site | ATL | TE08 | TE08 | N.C.R. | ----- |

Remark: ⁽¹⁾ Calibration period 1 year. ⁽²⁾ Calibration period 2 years.


NOTE: N.C.R. = No Calibration Request.

4.6.3. Setup

CDN Method

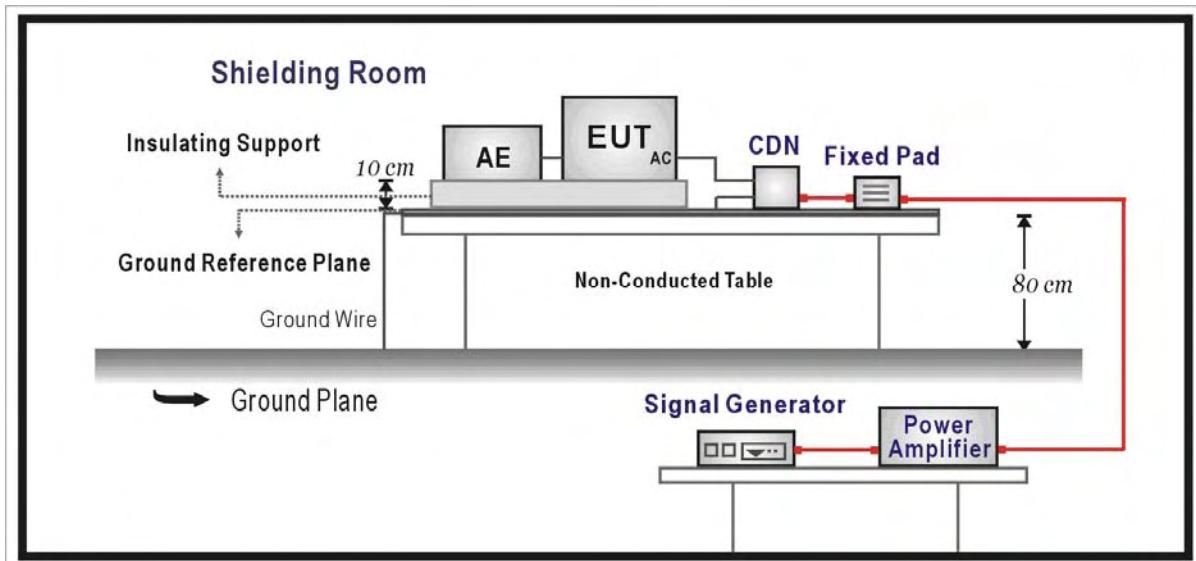

EM Clamp Method

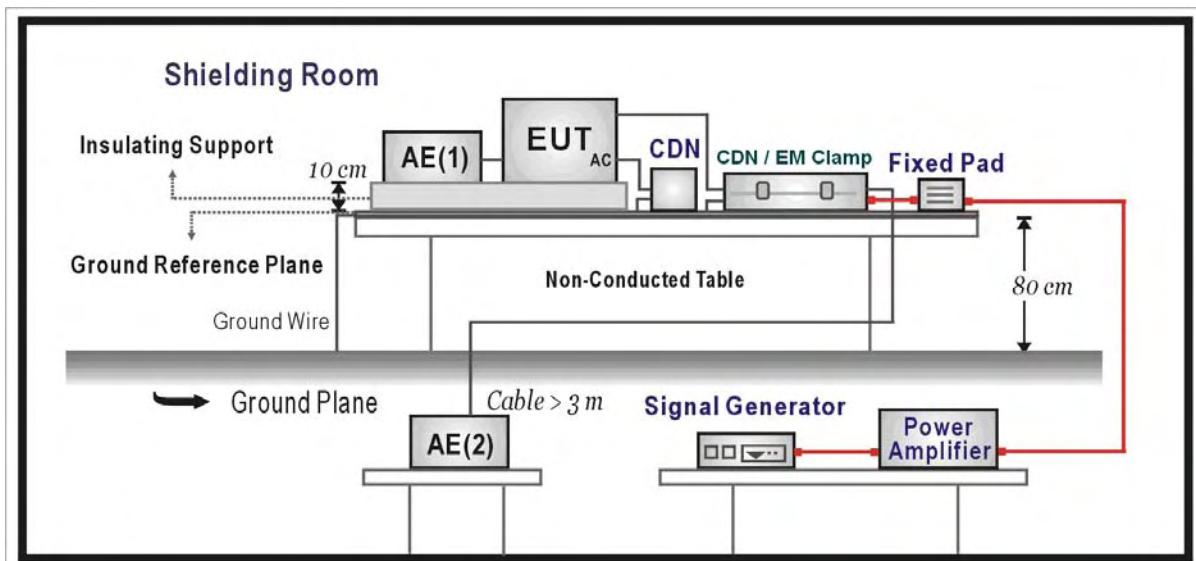

4.6.4. Test Procedure


Test Procedures were referred to EN 61000-4-6 sub-clause 8

4.6.5. Test Result

| Product | Network Camera | | | | | |
|----------------------|--------------------------|---------------|--------------------|---------------|---|--------|
| Test Item | Conducted Susceptibility | | | | | |
| Test Mode | Mode 1 | | | | | |
| Date of Test | 09/14/2011 | | | Test Site | TE08 | |
| Frequency Band (MHz) | Field Strength (Vrms) | AM (1kHz) (%) | Inject Port | Inject Method | Performance Criterion | Result |
| 0.15 ~ 80 | 10 | 80 | CDN-M2 | Direct | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C | PASS |
| 0.15 ~ 80 | 10 | 80 | LAN Port (100Mbps) | Clamp | <input checked="" type="checkbox"/> A <input type="checkbox"/> B <input type="checkbox"/> C | PASS |

Note: "A": The apparatus shall continue to operate as intended during and after the test, no degradation of performance or loss of function.

4.6.6. Test Photograph

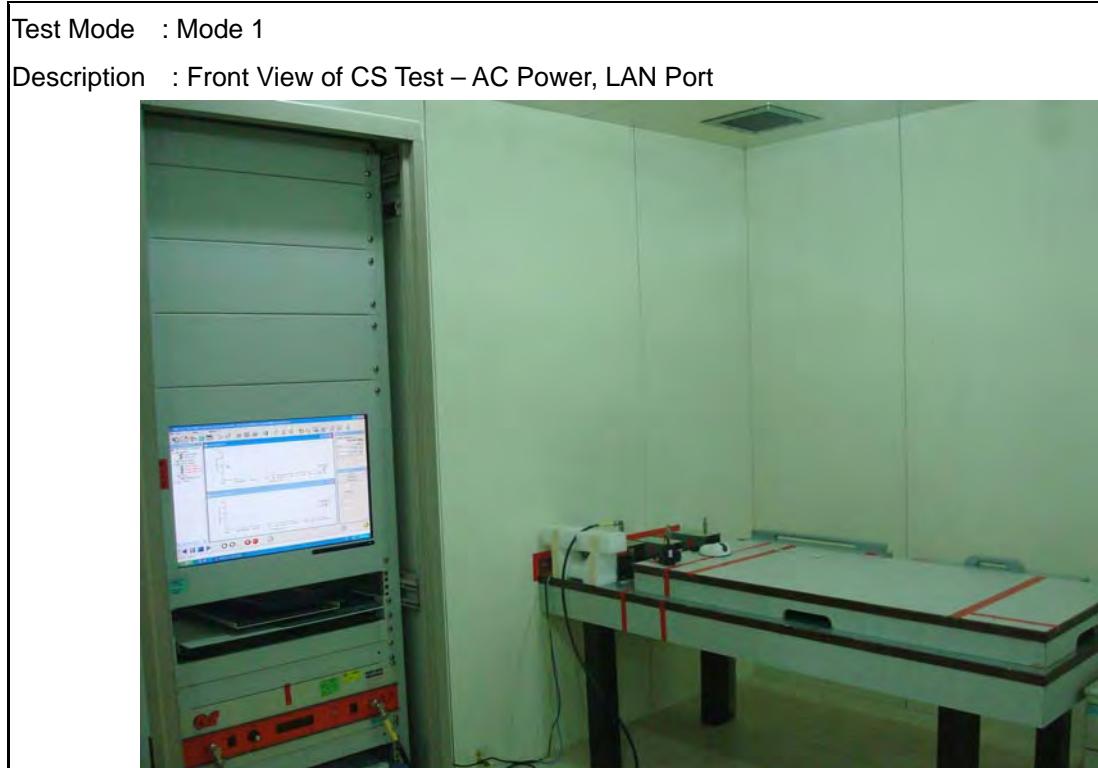

5 EUT Photograph


(1) EUT Photo



(2) EUT Photo



(3) EUT Photo

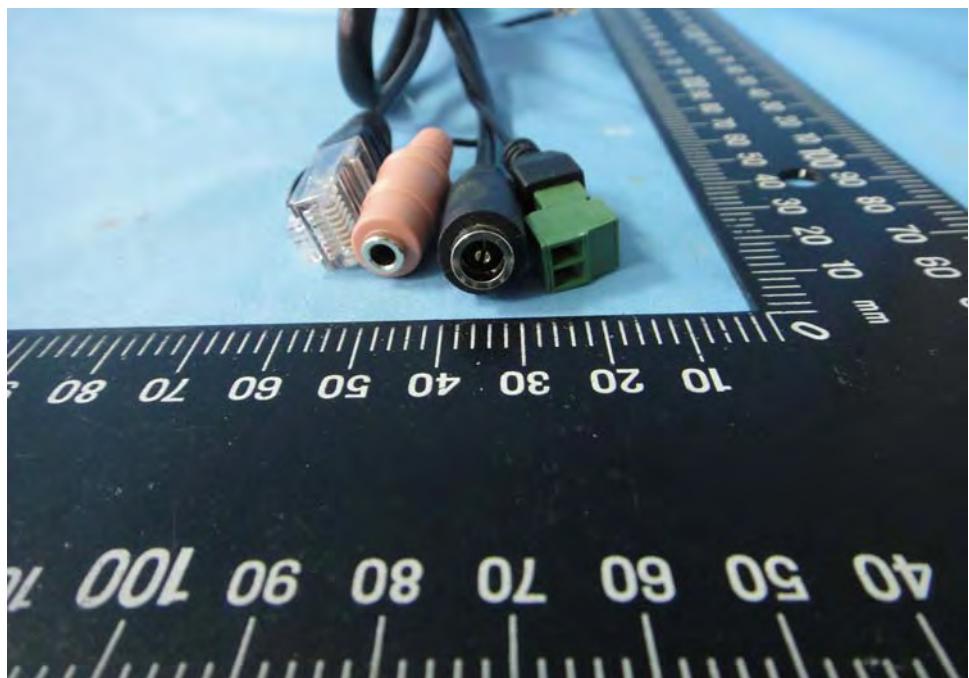

(4) EUT Photo





(5) EUT Photo

